

DOCSIS[®] Provisioning of GPON Specifications

DPoGv1.0

DPoG Physical Layer Specification

DPoG-SP-PHYv1.0-I01-141001

ISSUED

Notice

This DPoG[™] specification is the result of a cooperative effort undertaken at the direction of Cable Television Laboratories, Inc. for the benefit of the cable industry and its customers. You may download, copy, distribute, and reference the documents herein only for the purpose of developing products or services in accordance with such documents, and educational use. Except as granted by CableLabs[®] in a separate written license agreement, no license is granted to modify the documents herein (except via the Engineering Change process), or to use, copy, modify or distribute the documents for any other purpose.

This document may contain references to other documents not owned or controlled by CableLabs. Use and understanding of this document may require access to such other documents. Designing, manufacturing, distributing, using, selling, or servicing products, or providing services, based on this document may require intellectual property licenses from third parties for technology referenced in this document. To the extent this document contains or refers to documents of third parties, you agree to abide by the terms of any licenses associated with such third party documents, including open source licenses, if any.

© Cable Television Laboratories, Inc. 2014

DISCLAIMER

This document is furnished on an "AS IS" basis and neither CableLabs nor its members provides any representation or warranty, express or implied, regarding the accuracy, completeness, noninfringement, or fitness for a particular purpose of this document, or any document referenced herein. Any use or reliance on the information or opinion in this document is at the risk of the user, and CableLabs and its members shall not be liable for any damage or injury incurred by any person arising out of the completeness, accuracy, or utility of any information or opinion contained in the document.

CableLabs reserves the right to revise this document for any reason including, but not limited to, changes in laws, regulations, or standards promulgated by various entities, technology advances, or changes in equipment design, manufacturing techniques, or operating procedures described, or referred to, herein.

This document is not to be construed to suggest that any company modify or change any of its products or procedures, nor does this document represent a commitment by CableLabs or any of its members to purchase any product whether or not it meets the characteristics described in the document. Unless granted in a separate written agreement from CableLabs, nothing contained herein shall be construed to confer any license or right to any intellectual property. This document is not to be construed as an endorsement of any product or company or as the adoption or promulgation of any guidelines, standards, or recommendations.

Document Status Sheet

Document Control Number:	DPoG-SP-PHYv1.0-I01-141001			
Document Title:	DPoG Physical Layer Specification			
Revision History:	I01 - 10/01/2014			
Date:	October 1, 2014			
Status:	Work in Progress	Draft	Issued	Closed
Distribution Restrictions:	Author Only	CL/Member	CL/Member/Vendor	Public

Key to Document Status Codes

Work in Progress	An incomplete document, designed to guide discussion and generate feedback that may include several alternative requirements for consideration.
Draft	A document in specification format considered largely complete, but lacking review by Members and vendors. Drafts are susceptible to substantial change during the review process.
Issued	A generally public document that has undergone Member and Technology Supplier review, cross-vendor interoperability, and is for Certification testing if applicable. Issued Specifications are subject to the Engineering Change Process.
Closed	A static document, reviewed, tested, validated, and closed to further engineering change requests to the specification through CableLabs.

Trademarks

CableLabs® is a registered trademark of Cable Television Laboratories, Inc. Other CableLabs marks are listed at <http://www.cablelabs.com/certqual/trademarks>. All other marks are the property of their respective owners.

Contents

1	INTRODUCTION	5
1.1	Scope	5
1.2	Goals.....	5
1.3	Requirements	6
1.5	Reference Architecture	7
1.6	DPoG Interfaces and Reference Points.....	8
2	REFERENCES	9
2.1	Normative References.....	9
2.2	Informative References.....	9
2.3	Reference Acquisition.....	10
3	TERMS AND DEFINITIONS	11
3.1	DPoG Network Elements.....	11
3.2	Other Terms and Definitions	11
4	ABBREVIATIONS AND ACRONYMS.....	13
5	GPON PHY	15
5.1	DPoG Additional PHY Requirements	15
5.1.1	<i>Forward Error Correction</i>	15
5.1.2	<i>FEC</i>	15
5.2	Raman Interference Mitigation	16
5.3	Optical Monitoring	16
5.4	D-ONU Optical Power Control	16
6	D-ONU UNI "S" INTERFACE.....	17
6.1	Physical Interfaces	17
6.2	Logical Interfaces	17
APPENDIX I ACKNOWLEDGMENTS (INFORMATIVE)		18

Figures

Figure 1 - DPoGv1.0 Reference Architecture.....	7
Figure 2 - DPoGv1.0 Interfaces and Reference Points	8

Tables

Table 1 - DPoGv1.0 Series of Specifications	6
---	---

1 INTRODUCTION

DOCSIS Provisioning of GPON (DPoG) version 1.0 specifications are a joint effort of Cable Television Laboratories (CableLabs), cable operators, vendors, and suppliers to support GPON technology using existing DOCSIS-based back office systems and processes. Gigabit-capable Passive Optical Networks (GPON) as defined in the ITU-T G.984 series defines a standard for the use of passive optical networks for delivery of several different bit rates. This architecture is based only on the 2.488 Gigabits per second (Gb/s) of downstream bandwidth, and 1.244 Gb/s of upstream bandwidth. Further, GPON Encapsulation Method (GEM) is required for all user traffic.

Similarly, 10-Gigabit-capable Passive Optical Networks (XG-PON) defines a standard for the use of PON to deliver 9.95328 Gb/s downstream and 2.48832 Gb/s upstream, as per ITU-T G.987. XG-PON encapsulation method (XGEM) is the data frame transport scheme required for all user traffic.

This document will not provide a primer on GPON, XG-PON or the associated ITU standards. It is expected that the reader will refer to those documents as needed.

DPoG specifications are focused on DOCSIS-based provisioning and operations of Internet Protocol (IP) using DOCSIS Internet service (which is typically referred to as High Speed Data (HSD)), or IP(HSD) for short, and Metro Ethernet services as described by Metro Ethernet Forum (MEF) standards. DPoG Networks offer IP(HSD) services, functionally equivalent to DOCSIS networks, where the DPoG System acts like a DOCSIS CMTS and the DPoG System and DPoG Optical Network Unit (D-ONU) together act like a DOCSIS CM.

1.1 Scope

This specification identifies requirements for the GPON PHY for the adaptation or additions to DOCSIS specifications that are required to support DOCSIS Provisioning of GPON.

This specification:

- Specifies interoperable implementations for various DPoG vendors; and
- Specifies additional requirements for GPON PHY layer as used in cable networks which are outside the scope of [G.984.2] specifications.

1.2 Goals

The DPoG PHY specification accomplishes the following objectives:

- Identify and document the requirements for Forward Error Correction.
- Define requirements for optical monitoring and power control.

1.3 Requirements

Throughout this document, the words that are used to define the significance of particular requirements are capitalized. These words are:

"MUST"	This word means that the item is an absolute requirement of this specification.
"MUST NOT"	This phrase means that the item is an absolute prohibition of this specification.
"SHOULD"	This word means that there may exist valid reasons in particular circumstances to ignore this item, but the full implications should be understood and the case carefully weighed before choosing a different course.
"SHOULD NOT"	This phrase means that there may exist valid reasons in particular circumstances when the listed behavior is acceptable or even useful, but the full implications should be understood and the case carefully weighed before implementing any behavior described with this label.
"MAY"	This word means that this item is truly optional. One vendor may choose to include the item because a particular marketplace requires it or because it enhances the product, for example; another vendor may omit the same item.

1.4 DPoG Version 1.0 Specifications

A list of the specifications included in the DPoGv1.0 series is provided in Table 1. For further information please refer to <http://www.cablelabs.com/specs/specification-search/>

Table 1 - DPoGv1.0 Series of Specifications

Designation	Title
DPoG-SP-ARCHv1.0	DPoG Architecture Specification
DPoG-SP-OAMv1.0	DPoG OAM Extensions Specification
DPoG-SP-PHYv1.0	DPoG Physical Layer Specification
DPoG-SP-SECv1.0	DPoG Security and Certificate Specification
DPoG-SP-MULPIv1.0	DPoG MAC and Upper Layer Protocols Interface Specification
DPoG-SP-OSSIv1.0	DPoG Operations and Support System Interface Specification

1.5 Reference Architecture

The DPoG reference architecture is shown in Figure 1. Refer to [DPoG-ARCH] for a discussion of this architecture.

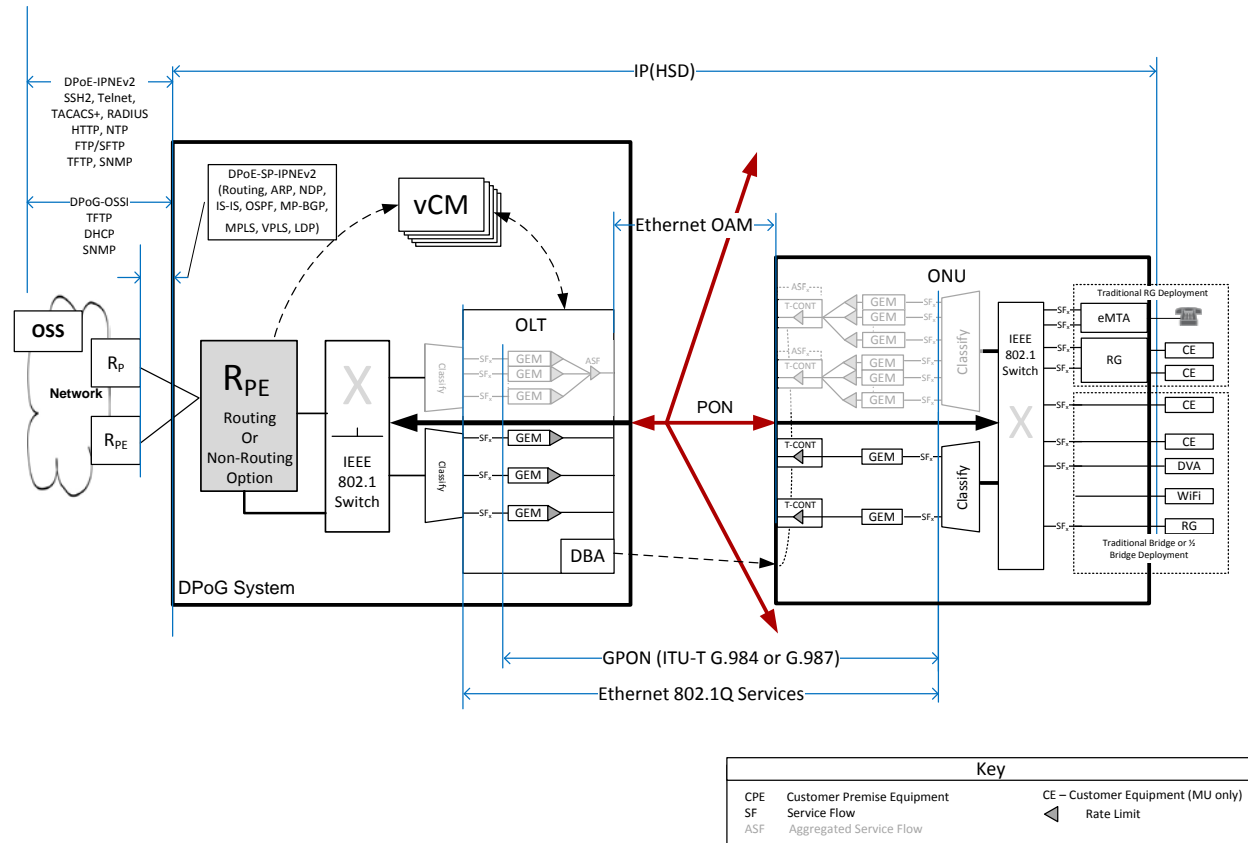


Figure 1 - DPoGv1.0 Reference Architecture

1.6 DPoG Interfaces and Reference Points

The DPoG interfaces and reference points shown in Figure 2 provide a basis for the description and enumeration of DPoG specifications for the DPoG architecture. Refer to [DPoG-ARCH] for a discussion of these interfaces and reference points.

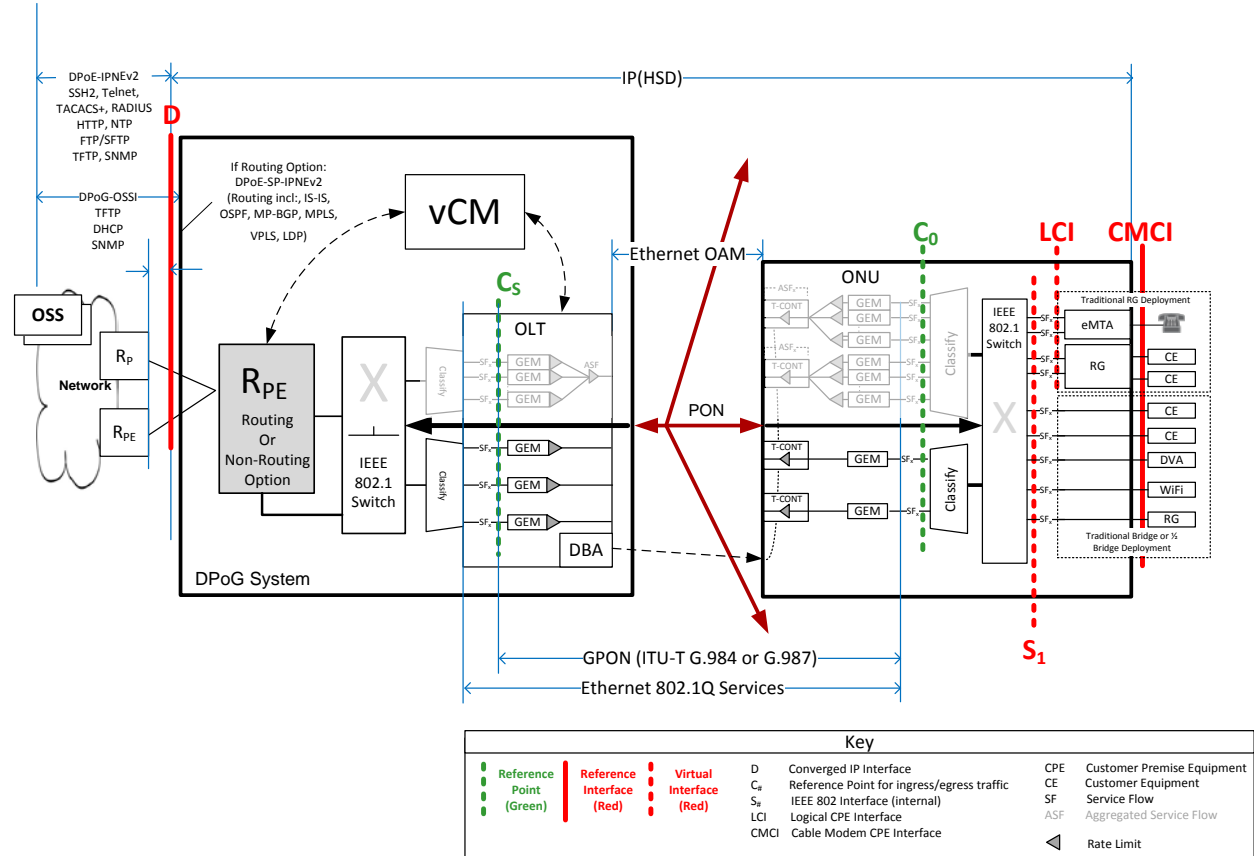


Figure 2 - DPoGv1.0 Interfaces and Reference Points

2 REFERENCES

2.1 Normative References

In order to claim compliance with this specification, it is necessary to conform to the following standards and other works as indicated, in addition to the other requirements of this specification. Notwithstanding, intellectual property rights may be required to use or implement such normative references. At the time of publication, the editions indicated were valid. All references are subject to revision, and users of this document are encouraged to investigate the possibility of applying the most recent editions of the documents listed below. References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific. For a non-specific reference, the latest version applies.

- [802.1] IEEE Std 802.1, Refers to entire suite of IEEE 802.1 standards unless otherwise specified.
- [802.3] IEEE Std 802.3TM-2012, IEEE Standard for Ethernet, December 2012.
- [G.984.2] ITU-T Recommendation G.984.2, Gigabit-capable Passive Optical Networks (G-PON): Physical Media Dependent (PMD) layer specification, Amendment 2.
- [G.984.3] ITU-T Recommendation G.984.3, Gigabit-capable Passive Optical Networks (G-PON): Transmission Convergence Layer Specification.
- [G.984.5] ITU-T Recommendation G.984.5, Gigabit-capable Passive Optical Networks (G-PON): Enhancement band.
- [G.987.2] ITU-T Recommendation G.987.2, 10-Gigabit-capable passive optical networks (XG-PON): Physical media dependent (PMD) layer specification.
- [G.987.3] ITU-T Recommendation G.987.3, 10-Gigabit-capable passive optical networks (XG-PON): Transmission Convergence Layer Specification.
- [SFF-8472] SFF-8472 Specification for Diagnostic Monitoring Interface for Optical Transceivers, Revision 12.1, released September 2014.
- [SFP MSA] INF 8074i Rev 1.0, SFP (Small Form-factor Pluggable) Transceiver, released 12 May 2001.

2.2 Informative References

This specification uses the following informative references.

- [802.1Q] IEEE Std. 802.1Q-2011, IEEE Standard for Local and Metropolitan Area Networks-Virtual Bridged Local Area Networks, August 2011.
- [DPoE-OAMv2.0] DOCSIS Provisioning of EPON, DPoE OAM Extensions Specification, DPoE-SP-OAMv2.0, Cable Television Laboratories, Inc.
- [DPoG-ARCH] DOCSIS Provisioning of GPON, DPoG Architecture Specification, DPoG-SP-ARCHv1.0, Cable Television Laboratories, Inc.
- [DPoG-OAM] DOCSIS Provisioning of GPON, DPoG OAM Extensions Specification, DPoG-SP-OAM-v1.0, Cable Television Laboratories, Inc.
- [DOCSIS] Refers to entire suite of DOCSIS 3.0 specifications unless otherwise specified.
- [eDOCSIS] Data-Over-Cable Service Interface Specifications, eDOCSIS Specification, CM-SP-eDOCSIS, Cable Television Laboratories, Inc.
- [MULPIv3.0] Data-Over-Cable Service Interface Specifications, MAC and Upper Layer Protocols Interface Specification, CM-SP-MULPIv3.0, Cable Television Laboratories, Inc.

2.3 Reference Acquisition

- Cable Television Laboratories, Inc., 858 Coal Creek Circle, Louisville, CO 80027; Phone +1-303-661-9100; Fax +1-303-661-9199; <http://www.cablelabs.com>
- Institute of Electrical and Electronics Engineers (IEEE), +1 800 422 4633 (USA and Canada); <http://www.ieee.org>
- Internet Engineering Task Force (IETF) Secretariat, 48377 Fremont Blvd., Suite 117, Fremont, California 94538, USA, Phone: +1-510-492-4080, Fax: +1-510-492-4001, <http://www.ietf.org>
- ITU-T Recommendations: <http://www.itu.int/ITU-T/publications/recs.html>
- Small Form Factor Committee (SFF), <http://www.sffcommittee.com>
- SCTE, Society of Cable Telecommunications Engineers Inc., 140 Philips Road, Exton, PA 19341 Phone: +1-800-542-5040, Fax: +1-610-363-5898, Internet: <http://www.scte.org/>

3 TERMS AND DEFINITIONS

This specification uses the following terms and definitions.

3.1 DPoG Network Elements

DEMARC	Short form of "Demarcation Device." This term means the device, owned and operated by the operator that provides the demarcation (sometimes called the UNI interface) to the customer. Some architectures describe this device as the CPE (as in DOCSIS) or the NID (as in the MEF model).
DPoG Network	This term means all the elements of a DPoG implementation, including at least one DPoG System, one or more D-ONUs connected to that DPoG System, and possibly one or more DEMARCS.
DPoG ONU (D-ONU)	This term means a DPoG-capable ONU that complies with all the DPoG specifications. A D-ONU may support logical and/or physical CPE interfaces.
DPoG System	This term refers to the set of subsystems within the hub site that provides the functions necessary to meet DPoG specification requirements.

3.2 Other Terms and Definitions

Address Resolution Protocol	A protocol of the IETF for converting network addresses to 48-bit Ethernet addresses.
Byte	A contiguous sequence of eight bits. An octet.
Burst	A single, continuous transmission in the upstream direction originating from a single ONU, where queued customer data is transmitted towards the DPoG System at the full data rate supported by the transmission channel. Between bursts, ONUs do not transmit any data.
Cable Modem CPE Interface	The interface defined in DOCSIS between a CM and CPE.
Classifier	A set of criteria used for packet matching according to TCP, UDP, IP, LLC, [802.1Q] packet fields. A classifier maps each packet to a Service Flow. A Downstream classifier is used by the DPoG System to assign packets to downstream service flows. An Upstream classifier is used by The D-ONU to assign packets to upstream service flows.
Codeword	An element of an error-correcting code used to detect and correct transmission errors.
Customer Premise Equipment (CPE)	Customer Premise Equipment as defined in [DOCSIS].
Data Link Layer	Layer 2 in the Open System Interconnection (OSI) architecture; the layer that provides services to transfer data over the transmission link between open systems (here, equal to GPON).
Data Rate	Rate Throughput, data transmitted in units of time usually in bits per second (bps). Various multipliers are used in this document, ranging from kbit/s (thousand bits per second) to Gbps (billion bits per second).
DPoG Operations and Maintenance Messaging (OAM)	DPoG OAM messaging as defined in [DPoG-OAM] and [DPoE-OAMv2.0].
Frame	Basic data organizational unit. Here, disambiguated per [G.984.3], section 5.6.
GPON	Gigabit-capable Passive Optical Networks (2.488 Gb/s downstream, 1.244 Gb/s upstream) as defined by G.984.

Logical CPE Interface	LCI as defined in [eDOCSIS].
Network Interface Device (NID)	A DEMARC device in DPoG specifications.
Upstream	The direction of transmission from the customer to the head-end.
XG-PON	An XG-PON (10 Gb/s downstream, 2.4 Gb/s upstream) as defined by G.987

4 ABBREVIATIONS AND ACRONYMS

This specification uses the following abbreviations:

BER	Bit error ratio
CMCI	Cable Modem CPE Interface
CoS	Class of Service
CPE	Customer Premise Equipment
DEMARC	Demarcation Device
D-ONU	DPoG Optical Network Unit
DoS	Denial of Service
DPoE	DOCSIS Provisioning and operations of EPON
eCM	embedded Cable Modem
eDVA	embedded Digital Voice Adapter
EPON	Ethernet Passive Optical Network
EVC	Ethernet Virtual Connection
FEC	Forward error correction
GPoN	Gigabit-capable Passive Optical Networks
IP	Internet Protocol
L2VPN	Layer 2 Virtual Private Network
LCI	Logical CPE Interface
MEF	Metro Ethernet Forum
MI	MEF INNI Interface at a customer premise
MU	MEF UNI Interface
NID	Network Interface Device
NNI	Network to Network Interface
NSI	Network Systems Interface
OAM	EPON Operations Administration and Maintenance
ODN	Optical distribution network
OLT	Optical Line Termination
ONU	Optical Network Unit
OSC	Optical Splitter Combiner
PCS	Physical Coding Sublayer
PDU	Protocol Data Units
PHY	Physical Layer
PMA	Physical Medium Attachment
PMD	Physical Media Dependent (Sublayer)
PON	Passive optical network
R	IP Router
SFP	Small Form-factor Pluggable
SFP+	Small Form-factor Pluggable Plus (+)
UNI	User Network Interface

VFI	Virtual Forwarding Instance
VSI	Virtual Switch Instance
X	IEEE Ethernet Switch (Generic)
XFP	X Form-factor Pluggable
XG-PON	10-Gigabit-capable Passive Optical Networks

5 GPON PHY

The specifications for the GPON PHY are in [G.984.2] and [G.984.5]. These documents and their associated amendments contain specifications for optical module wavelengths, receiver sensitivity and other parameters defining the GPON physical layer used in DPoG Networks. Details of wavelength planning, supported optical budgets, and split ratios for particular deployments are outside the scope of this specification.

5.1 DPoG Additional PHY Requirements

A DPoG System MUST support the 2.488 Gb/s downstream rate and associated optical interface parameters defined in [G.984.2]. A DPoG System MUST support the 1.244 Gb/s upstream rate and associated optical interface parameters defined in [G.984.2].

A D-ONU MUST support the 2.488 Gb/s downstream rate and associated optical interface parameters defined in [G.984.2]. A D-ONU MUST support the 1.244 Gb/s upstream rate and associated optical interface parameters defined in [G.984.2].

A DPoG System MUST support the optical wavelength and filtering parameters defined in [G.984.5]. A D-ONU MUST support the optical wavelength and filtering parameters defined in [G.984.5]. The D-ONU S/X protection against next generation wavelengths, as shown in Figure 5 of [G.984.5], MUST extend to $\lambda_6 = 1625$ nm (not $\lambda_6 = 1580$ nm).

A DPoG System MUST support the Class B+ optical power budget parameters defined in Appendix III of [G.984.2]. A D-ONU MUST support the Class B+ optical power budget parameters defined in Appendix III of [G.984.2].

A DPoG System MUST support the Class C+ optical power budget parameters defined in Appendix V of [G.984.2] for single-sided extension.

A DPoG System MUST support the XG-PON physical medium dependent layer parameters defined in [G.987.2]. A D-ONU MUST support the XG-PON physical medium dependent layer parameters defined in [G.987.2].

An XG-PON DPoG System MUST support the N1 optical power budget parameters defined in [G.987.2]. An XG-PON D-ONU MUST support the N1 optical power budget parameters defined in [G.987.2].

An XG-PON DPoG System MUST support the N2a optical power budget parameters defined in [G.987.2]. An XG-PON D-ONU MUST support the N2a optical power budget parameters defined in [G.987.2].

5.1.1 Forward Error Correction

A GPON DPoG System MUST support the Forward Error Correction (FEC) methods defined in [G.984.3], with the additional capabilities as defined in this section. A GPON D-ONU MUST support the Forward Error Correction (FEC) methods defined in [G.984.3], with the additional capabilities defined in this section.

An XG-PON DPoG System MUST support the FEC methods defined in [G.987.3]. An XG-PON D-ONU MUST support the FEC methods defined in [G.987.3].

5.1.2 FEC

The DPoG System MUST support enabling downstream FEC on a per-PON basis. The DPoG System MUST support enabling upstream FEC on a per-D-ONU basis.

The DPoG System MUST be able to enable or disable FEC encoding according to operator provisioning.

5.1.2.1 GPON FEC

A GPON DPoG System MUST support FEC as defined in [G.984.3]. A GPON D-ONU MUST support FEC as defined in [G.984.3].

A GPON DPoG System MUST support different FEC states (enabled / disabled) in the upstream and downstream directions. Correspondingly, a GPON D-ONU MUST support different FEC states (enabled / disabled) in the upstream and downstream directions.

5.1.2.2 XG-PON FEC

An XG-PON DPoG System MUST support FEC as defined in [G.987.3]. An XG-PON D-ONU MUST support FEC as defined in G.987.3.

In XG-PON, downstream FEC is always used. An XG-PON DPoG System MUST support enabling upstream FEC on a per-D-ONU basis according to operator provisioning.

5.2 Raman Interference Mitigation

GPON and XG-PON do not require any additional mechanisms to mitigate Raman Interference.

5.3 Optical Monitoring

A DPoG System MUST support all optical monitoring values as specified in [SFF-8472], including monitoring received optical power, transmit power, transmit bias current, internal voltage, and temperature. Similarly the D-ONU MUST support all optical monitoring values as specified in [SFF-8472], including monitoring received optical power, transmit power, transmit bias current, internal voltage, and temperature.

A DPoG System MUST be able to report received optical power on a per-D-ONU basis, as well as reporting received optical power during idle time on the PON upstream.

5.4 D-ONU Optical Power Control

One possible failure mode for a D-ONU is for the laser driver to remain in the enabled state outside of the assigned transmission slot, continually generating light into the PON, interfering with transmissions of other D-ONUs in the upstream. The procedure used to detect malfunctioning D-ONUs, and the decision whether to disable them or not, is outside the scope of this specification. Once the specific D-ONU has been identified as the source of the problem, the DPoG System MUST be able to isolate such failed D-ONUs from the PON by disabling their transmitter until the D-ONU can be replaced. The DPoG System disables a D-ONU laser by means of the Disable_Serial_Number PLOAM message.

A D-ONU that receives the Disable_Serial_Number PLOAM message MUST act as described in [G.984.3] for a GPON D-ONU or [G.987.3] for an XG-PON D-ONU.

A DPoG System MUST provide the operator the capability to turn on or off such a rogue D-ONU detection function for each PON and for an entire DPoG System.

6 D-ONU UNI "S" INTERFACE

The S interface in Figure 2 is the User to Network Interface (UNI). D-ONUs support two types of S interfaces: physical and logical. Although logical interfaces do not necessarily connect to the CPE, the transport of services to logical and physical interfaces is the same. Any S interface that is configured as a CMCI, MI, or MU interface is a physical interface.

6.1 Physical Interfaces

D-ONUs that do not comply with the [SFP MSA] MUST support standard Ethernet interfaces for the S interfaces configured as (CMCI, MI, or MU) physical interfaces, as defined in [802.3].

A D-ONU that complies with the [SFP MSA] MUST support the standard SFP interface defined in the [SFP MSA]. A D-ONU that complies with the [SFP MSA] MUST also support the digital management interface defined in [SFF-8472].

6.2 Logical Interfaces

In addition to a physical interface, a D-ONU MAY have a logical Ethernet [802.3] interface. This interface could be used to provide an Ethernet transport across the PON from the DPoG System to a real physical interface within the D-ONU package. It could be a sub-interface to a switch or bridge group within the D-ONU, or a sub-interface on an [802.3] interface of a real physical interface as described in Section 6.1.

Appendix I Acknowledgments (Informative)

On behalf of our industry, we would like to thank the following individuals for their contributions to the development of this specification, listed in alphabetical order of company affiliation.

Contributor	Company Affiliation
Richard Goodson	Adtran
Arkin Aydin, Rex Coldren, Michael Shaffer	Alcatel-Lucent
Janet Bean, Jeff Weber	ARRIS
Howard Abramson, Samuel Chen, Robin Grindley, Igor Ternovsky	Broadcom
Stephen Burroughs, Stuart Hoggan, Curtis Knittle	CableLabs
Jeffrey Buffum, Phil Fine, Shaun Missett, Todd Ortberg, Hal Roberts	Calix
Jason Combs, Saifur Rahman, Hossam Salib, Jorge Salinger, Joe Solomon, Hardik Shukla, Mehmet Toy	Comcast
Brian Kinnard	Commscope
Ony Anglade, Eugene Dai, Jeff Finkelstein	Cox
Mike Holmes	Finisar
Roy Arav, David Gaynor	Oliver Systems