

Superseded **by a later version of this document**

PacketCable™ 2.0

E-UE Provisioning Data Model Specification

PKT-SP-EUE-DATA-I02-080710

ISSUED

Notice

This PacketCable™ specification is the result of a cooperative effort undertaken at the direction of Cable Television Laboratories, Inc. for the benefit of the cable industry and its customers. This document may contain references to other documents not owned or controlled by CableLabs. Use and understanding of this document may require access to such other documents. Designing, manufacturing, distributing, using, selling, or servicing products, or providing services, based on this document may require intellectual property licenses from third parties for technology referenced in this document.

Neither CableLabs nor any member company is responsible to any party for any liability of any nature whatsoever resulting from or arising out of use or reliance upon this document, or any document referenced herein. This document is furnished on an "AS IS" basis and neither CableLabs nor its members provides any representation or warranty, express or implied, regarding the accuracy, completeness, noninfringement, or fitness for a particular purpose of this document, or any document referenced herein.

© Copyright 2007 - 2008 Cable Television Laboratories, Inc.
All rights reserved.

Document Status Sheet

Document Control Number	PKT-SP-EUE-DATA-I02-080710			
Document Title	E-UE Provisioning Data Model Specification			
Revision History	I01 - Released November 6, 2007			
	I02 - Released July 10, 2008			
Date	July 10, 2008			
Status	Work in Progress	Draft	Issued	Closed
Distribution Restrictions	Author Only	CL/Member	CL/Member/Vendor	Public

Key to Document Status Codes

Work in Progress	An incomplete document, designed to guide discussion and generate feedback that may include several alternative requirements for consideration.
Draft	A document in specification format considered largely complete, but lacking review by Members and vendors. Drafts are susceptible to substantial change during the review process.
Issued	A stable document, which has undergone rigorous member and vendor review and is suitable for product design and development, cross-vendor interoperability, and for certification testing.
Closed	A static document, reviewed, tested, validated, and closed to further engineering change requests to the specification through CableLabs.

Trademarks

CableLabs®, DOCSIS®, EuroDOCSIS™, eDOCSIS™, M-CMTS™, PacketCable™, EuroPacketCable™, PCMM™, CableHome®, CableOffice™, OpenCable™, OCAP™, CableCARD™, M-Card™, DCAS™, tru2way™, and Cable PC™ are trademarks of Cable Television Laboratories, Inc.

Contents

1	SCOPE.....	1
1.1	Introduction and Purpose.....	1
1.2	Document Overview.....	1
1.3	Requirements	1
2	REFERENCES	2
2.1	Normative References	2
2.2	Informative References.....	3
2.3	Reference Acquisition	3
3	TERMS AND DEFINITIONS.....	4
4	ABBREVIATIONS AND ACRONYMS.....	5
5	TECHNICAL OVERVIEW	6
5.1	Embedded User Equipment (E-UE)	6
5.2	E-UE Provisioning Framework	6
5.3	E-UE Provisioning Data Model.....	6
6	E-UE PROVISIONING MIBS FRAMEWORK REQUIREMENTS.....	8
6.1	eCM MIB Requirements.....	9
6.1.1	DOCSIS MIB Modules.....	9
6.1.2	eDOCSIS MIB Modules.....	9
6.1.3	Battery Backup UPS MIB module	9
6.2	eUE MIB Requirements	9
6.2.1	eUE MIB Modules	9
6.2.2	IETF MIB Modules	9
6.2.3	eDOCSIS MIB Modules.....	10
6.2.4	SNMP MIB Requirements.....	10
6.3	Configuration Data Element Requirements.....	13
6.3.1	Configuration File Requirements	13
6.3.2	Certificate Bootstrapping File Requirements	14
6.4	Management Event Reporting Requirements.....	15
ANNEX A	PACKETCABLE EUE COMMON MODULES	17
A.1	Textual Conventions MIB Module	17
ANNEX B	PACKETCABLE EUE DEVICE CONFIGURATION MODULES	23
B.1	Device Configuration MIB Module.....	23
B.2	User Configuration MIB Module	36
ANNEX C	PACKETCABLE EUE PROVISIONING AND MANAGEMENT MODULES.....	49
C.1	Provisioning and Management MIB Module	49
C.2	Management Event MIB Module	55
ANNEX D	PACKETCABLE EUE ADDITIONAL MODULES.....	59
D.1	Certificate Bootstrapping XML Schema	59
D.2	Presence Configuration MIB	60
APPENDIX I	ILLUSTRATIVE PACKETCABLE DEPLOYMENT EXAMPLES	66

I.1	Example 1: Deployment with multiple Users and one PacketCable Application.....	66
I.2	Example 2: Deployment with multiple Users and multiple PacketCable Applications.....	67
APPENDIX II	ACKNOWLEDGEMENTS	71
APPENDIX III	REVISION HISTORY	72

Figures

Figure 1 - E-UE Provisioning Data Model.....	7
Figure 2 - E-UE Logical MIBs Framework.....	8
Figure 3 - Deployment with multiple users and one PacketCable Application.....	66
Figure 4 - Deployment with multiple users and multiple PacketCable Application.....	68

Tables

Table 1 - eUE ifTable Requirements.....	10
Table 2 - ipNetToPhysicalTable MIB Object Details	11
Table 3 - eUE usmUserTable Entry	11
Table 4 - eUE VacmSecurityToGroupTable	12
Table 5 - eUE vacmAccessTable.....	12
Table 6 - eUE Configuration Data Element Requirements	13
Table 7 - eUE Configuration Bootstrapping File Requirements	14
Table 8 - Additional eUE Management Events.....	15

Superseded

1 SCOPE

by a later version of this document

1.1 Introduction and Purpose

This specification presents the data element definitions and associated requirements for use with the PacketCable 2.0 E-UE Provisioning Framework. Specifically, it defines data to be used for configuration and management of E-UEs, and associated users. For more information on the PacketCable 2.0 E-UE Provisioning Framework, please refer to [PKT-EUE-PROV].

This document does not consider PacketCable 2.0 application specific data within its scope. PacketCable 2.0 application specifications are expected to specify such data.

1.2 Document Overview

The document is structured as follows:

- Section 2 – References.
- Section 3 – Terms and Definitions.
- Section 4 – Abbreviations.
- Section 5 – Informative section providing a description of the PacketCable 2.0 E-UE Provisioning Data Model.
- Section 6 – Normative section describing the data model requirements for PacketCable 2.0 E-UEs.
- Annex A – PacketCable eUE Common Modules
- Annex B – PacketCable eUE Device Configuration Modules
- Annex C – PacketCable eUE Provisioning and Management Modules
- Annex D – PacketCable eUE Additional Modules

1.3 Requirements

Throughout this document, the words that are used to define the significance of particular requirements are capitalized. These words are:

"MUST"	This word means that the item is an absolute requirement of this specification.
"MUST NOT"	This phrase means that the item is an absolute prohibition of this specification.
"SHOULD"	This word means that there may exist valid reasons in particular circumstances to ignore this item, but the full implications should be understood and the case carefully weighed before choosing a different course.
"SHOULD NOT"	This phrase means that there may exist valid reasons in particular circumstances when the listed behavior is acceptable or even useful, but the full implications should be understood and the case carefully weighed before implementing any behavior described with this label.
"MAY"	This word means that this item is truly optional. One vendor may choose to include the item because a particular marketplace requires it or because it enhances the product, for example; another vendor may omit the same item.

2 REFERENCES

2.1 Normative References

In order to claim compliance with this specification, it is necessary to conform to the following standards and other works as indicated, in addition to the other requirements of this specification. Notwithstanding, intellectual property rights may be required to use or implement such normative references.

- [CL-MIB-BB] CableLabs Specifications, Battery Backup MIB Specification, CL-SP-MIB-BB-I02-070119, January 19, 2007, Cable Television Laboratories, Inc.
- [DOCSIS-RFI] DOCSIS Specification, Radio Frequency Interface Specification, CM-SP-RFIv1.1-C01-050907, September 7, 2005, Cable Television Laboratories, Inc.
- [eDOCSIS] eDOCSIS Specification, CM-SP-eDOCSIS-I15-080626, June 26, 2008, Cable Television Laboratories, Inc.
- [PKT-EUE-PROV] PacketCable 2.0 E-UE Provisioning Specification, PKT-SP-EUE-PROV-I02-080710, July 10, 2008, Cable Television Laboratories, Inc.
- [PKT-SP-PROV1.5] PacketCable 1.5 Specification, MTA Device Provisioning, PKT-SP-PROV1.5-I03-070412, April 12, 2007, Cable Television Laboratories, Inc.
- [PKT-MEM1.5] PacketCable 1.5 Management Event Mechanism Specification, PKT-SP-MEM1.5-I03-070412, April 12, 2007, Cable Television Laboratories, Inc.
- [RFC2863] IETF RFC 2863, The Interfaces Group MIB, June 2000.
- [RFC3410] IETF RFC 3410, Introduction and Applicability Statements for Internet Standard Management Framework, December 2002.
- [RFC3412] IETF RFC 3412/STD0062, Message Processing and Dispatching for the Simple Network Management Protocol (SNMP), December 2002.
- [RFC3413] IETF RFC 3413/STD0062, Simple Network Management Protocol (SNMP) Applications, December 2002.
- [RFC3414] IETF RFC 3414/STD0062, User-based Security Model (USM) for version 3 of the Simple Network Management Protocol (SNMPv3), December 2002.
- [RFC3415] IETF RFC 3415/STD0062, View-based Access Control Model (VACM) for the Simple Network Management Protocol (SNMP), December 2002.
- [RFC3418] IETF RFC 3418, Management Information Base (MIB) for the Simple Network Management Protocol (SNMP).
- [RFC4113] IETF RFC 4113, Management Information Base for the User Datagram Protocol (UDP), June 2005.
- [RFC4293] IETF RFC 4293, Management Information Base for the Internet Protocol (IP), April 2006.
- [IETF STD58] IETF RFC 2578/STD0058, Structure of Management Information Version 2 (SMIv2), April 1999.
- [IETF STD62] IETF RFC 3411/STD0062, An Architecture for Describing Simple Network Management Protocol (SNMP) Management Frameworks, December 2002.

2.2 Informative References

This specification uses the following informative references.

[ARCH-FRM TR] PacketCable Architecture Framework Technical Report, PKT-TR-ARCH-FRM-V05-080425, April 25, 2008, Cable Television Laboratories, Inc.

2.3 Reference Acquisition

- Cable Television Laboratories, Inc., 858 Coal Creek Circle, Louisville, CO 80027; Phone +1-303-661-9100; Fax +1-303-661-9199; <http://www.cablelabs.com>.
- Internet Engineering Task Force (IETF) Secretariat, 46000 Center Oak Plaza, Sterling, VA 20166, Phone +1-571-434-3500, Fax +1-571-434-3535, <http://www.ietf.org/>.

3 TERMS AND DEFINITIONS

This specification uses the following terms:

Cable Modem	DOCSIS-compliant device which provides data transport connectivity from RFI to IP networks.
Embedded Cable Modem (eCM)	An embedded Cable Modem that has been enhanced with the features of the CableLabs eDOCSIS specification.
eUE	The logical PacketCable UE component of an E-UE, complies with eSAFE and PacketCable requirements.
E-UE	Embedded User Equipment. A single physical device embedded with an eDOCSIS-compliant DOCSIS Cable Modem and a PacketCable eUE.
Management Information Base	The description of the data items used by the Network Management for management and configuration of the PacketCable compliant E-UE. Such description is done based on the formal meta-language SMI defined by the corresponding IETF standards.
Network Management	The functions related to the management of data across the network.
Object Identifier	The sequence of integer positive numbers uniquely identifying the position of each MIB Object in the MIB Hierarchy.
User Datagram Protocol	A connectionless protocol built upon Internet Protocol (IP).

4 ABBREVIATIONS AND ACRONYMS

This specification uses the following abbreviations:

CM	Cable Modem.
DOCSIS®	Data-Over-Cable Service Interface Specifications
eCM	Embedded Cable Modem.
MIB	Management Information Base
OID	Object Identifier.
RFC	Request for Comments. Technical policy documents approved by the IETF which are available on the World Wide Web at http://www.ietf.cnri.reston.va.us/rfc.html .
SNMP	Simple Network Management Protocol. Refer to IETF STD 62
UDP	User Datagram Protocol
VACM	View-based Access Control Model

5 TECHNICAL OVERVIEW

PacketCable 2.0 is a CableLabs specification effort designed to support the convergence of voice, video, data, and mobility technologies. This document is part of the PacketCable 2.0 set of specifications and technical reports that define the base architecture and specifies the data elements required to configure and manage E-UEs, associated users and applications, using the PacketCable 2.0 E-UE Provisioning Framework. For more information about PacketCable 2.0, please refer to the PacketCable 2.0 Architecture Framework Technical Report [ARCH-FRM TR]. For more information on the PacketCable 2.0 E-UE Provisioning Framework, please refer to [PKT-EUE-PROV].

The PacketCable 2.0 E-UE Provisioning Framework relies on SNMP, as specified in [IETF STD62], for configuration and management. The data is specified using Structure of Management Information, Version 2 (SMIv2) Management Information Bases (MIBs), as specified in [IETF STD58]. Thus, this document specifies the configuration and management MIBs for use with the PacketCable 2.0 E-UE Provisioning Framework.

In this specification, the term "DOCSIS" is used to refer to DOCSIS version 1.1 or later, unless explicitly specified otherwise. Additionally, all references to PacketCable within this document are assumed to be PacketCable 2.0, unless stated otherwise.

5.1 Embedded User Equipment (E-UE)

The E-UE is a single physical device embedded with an eDOCSIS-compliant DOCSIS Cable Modem (eCM) and an eUE that complies with eDOCSIS eSAFE and PacketCable UE requirements. For more information on E-UEs please refer to [PKT-EUE-PROV].

5.2 E-UE Provisioning Framework

The E-UE Provisioning Framework is a PacketCable 2.0 configuration and management framework based on the PacketCable 1.5 Device Provisioning specification. For more information on the E-UE Provisioning Framework, please refer to [PKT-EUE-PROV].

This document is to be used in conjunction with the E-UE Provisioning Framework, and also relies on the PacketCable 1.5 Device Provisioning specification. For more information on the latter, please refer to [PKT-SP-PROV1.5].

5.3 E-UE Provisioning Data Model

The E-UE Provisioning Data Model serves eCMs, eUEs, users and associated applications. For the eCM component it borrows from the DOCSIS suite of specifications with no additional enhancements. The eUE, user, and application data are logically separated, and specified in this document. Given the use of SNMP for configuration and management, the eUE component is provided with data pertaining to itself, users, and applications.

The logical representation of the E-UE Provisioning Data Model is specified in Figure 1.

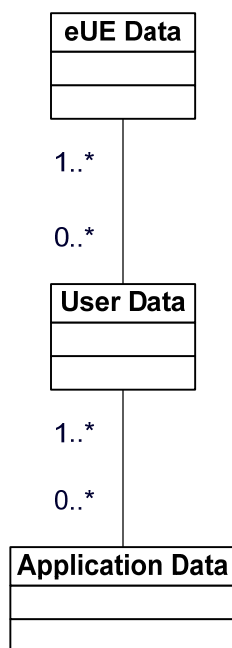


Figure 1 - E-UE Provisioning Data Model

6 E-UE PROVISIONING MIBS FRAMEWORK REQUIREMENTS

The E-UE MIBS framework provides the MIB module implementation requirements for the E-UE. An informative, logical framework depicting MIB modules in the E-UE components is presented in Figure 2. The rest of this section presents the specific requirements.

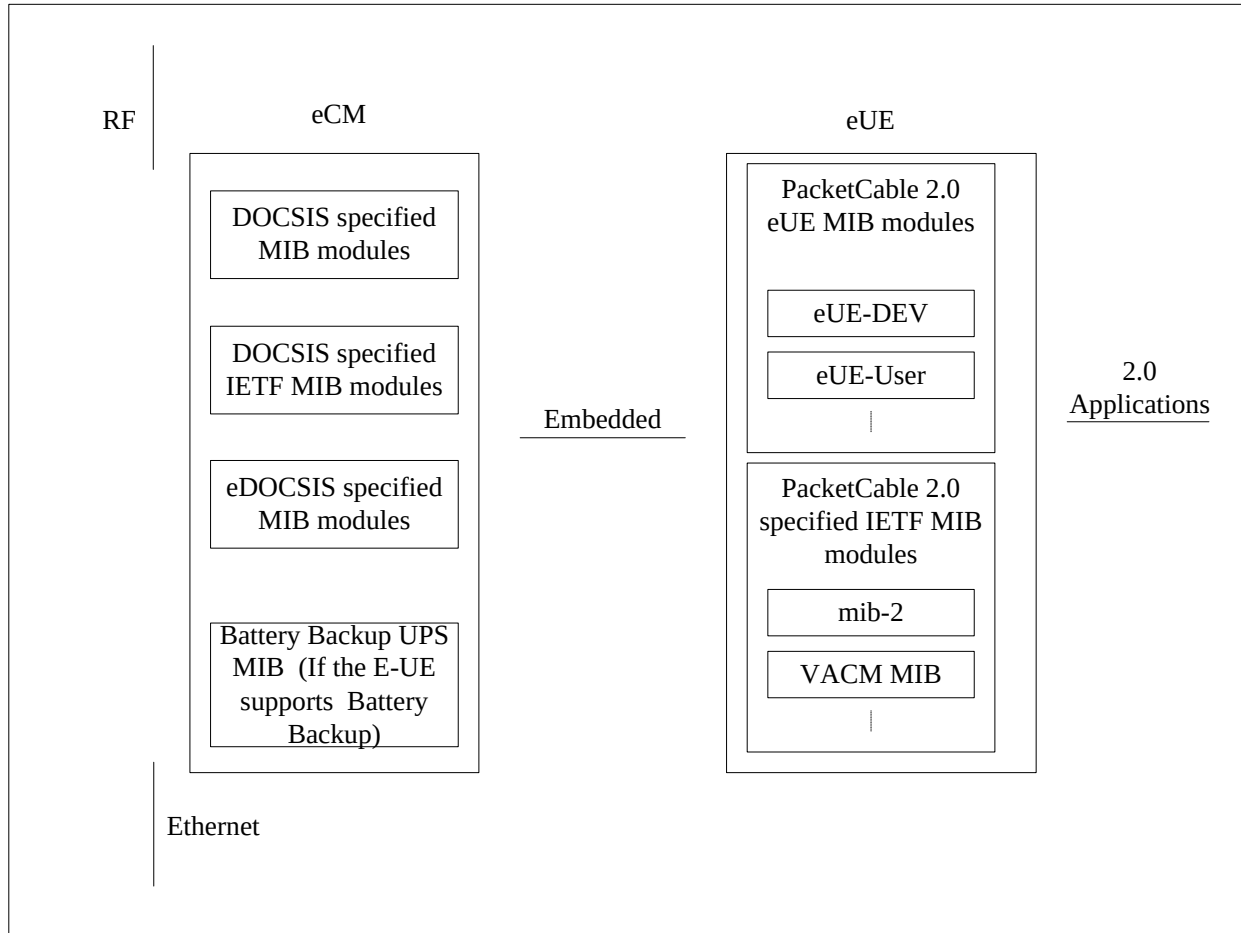


Figure 2 - E-UE Logical MIBs Framework

The eCM component of an E-UE needs to comply with the DOCSIS and eDOCSIS suite of specifications. The eUE component is required to support the data model that was informatively described in Section 5.3. To provide more information:

- The eUE can be associated with one or more Users.
- Each User can be associated with one or more applications.
- Each application has one more features; each feature has a set of configuration data.

Furthermore, each User can be associated with one or more eUEs. However, this is not possible to achieve using an SNMP-based framework that requires the data to be physically stored on a single client. In the E-UE Provisioning framework, this client is the eUE (for PacketCable data). Support for the other requirements is achieved by using an array of mappings:

- Association of an eUE with multiple Users,
- Association of a User with multiple Applications; each Application being associated with one Profile,
- Association of a Profile with multiple features; some of which could be shared with other Profiles belonging to the same Application.

6.1 eCM MIB Requirements

This section presents the MIB module requirements for the eCM component of the E-UE.

6.1.1 DOCSIS MIB Modules

The eCM component of an E-UE MUST comply with the DOCSIS MIB module requirements. For more information on the DOCSIS MIB modules, please refer to the DOCSIS specifications.

6.1.2 eDOCSIS MIB Modules

The eCM component of an E-UE MUST comply with the eDOCSIS MIB requirements. For more information on the eDOCSIS MIB module requirements, please refer to the eDOCSIS specification [eDOCSIS].

6.1.3 Battery Backup UPS MIB module

If the E-UE supports Battery Backup functionality, as specified in [CL-MIB-BB], the eCM component MUST support the Battery Backup and UPS MIB and associated requirements.

6.2 eUE MIB Requirements

This section presents the MIB module requirements for the eUE component of the E-UE.

6.2.1 eUE MIB Modules

The eUE component of the E-UE MUST comply with the PacketCable 2.0 specified eUE MIB configuration and management MIB modules specified in Annex B and Annex C, respectively. If an eUE supports PacketCable Presence, then the eUE MUST implement the eUE Presence MIB as specified in Annex D.2.

6.2.2 IETF MIB Modules

The eUE MUST implement the following MIB modules:

- MIB II system group as specified in [RFC3418];
- IF MIB as specified in [RFC2863];
- UDP MIB as specified in [RFC4113]; and
- IP MIB as specified in [RFC4293].

6.2.3 eDOCSIS MIB Modules

The eUE component of an E-UE MUST also comply with the eSAFE MIB requirements as specified in [eDOCSIS]; for example, requirements related to the implementation of MIB II.

6.2.4 SNMP MIB Requirements

6.2.4.1 eUESysDescr Requirements

The eUE's MIB II sysDescr MIB object MUST conform to the format specified in the DOCSIS specifications governing the eCM component.

6.2.4.2 eUE ifTable Requirements

The eUE MUST implement the row entry specified in Table 1 for the ifTable as specified in [RFC2863].

Table 1 - eUE ifTable Requirements

ifTable ([RFC2863])	Row Entry
IfIndex	1
ifDescr	"DOCSIS Embedded Interface"
IfType	other(1)
IfMtu	0
IfSpeed	0
ifPhysAddress	eUE MAC address
IfAdminStatus	up(1)
ifOperStatus	up(1)
IfLastChange	per [RFC2863]
ifInOctets (optional)	(n) if implemented, else 0
IfInNUCastPkts	Deprecated
IfInDiscards	0
IfInErrors	0
IfUnknownProtos	0
ifOutOctets (optional)	(n) if implemented, else 0
ifOutUCastPkts (optional)	(n) if implemented, else 0
IfOutNUCastPkts	Deprecated
IfOutDiscards	0
IfOutErrors	0
IfOutQlen	Deprecated
IfSpecific	Deprecated

6.2.4.3 eUE ipNetToPhysicalTable Requirements

The eUE MUST implement the row entry specified in Table 2 for the ipNetToPhysicalTable as specified in [RFC4293].

Table 2 - ipNetToPhysicalTable MIB Object Details

ipNetToPhysicalTable	CM device
ipNetToPhysicalIfIndex	1
ipNetToPhysicalPhysAddress	eCM MAC Address
ipNetToPhysicalNetAddressType	ipv4(1) or ipv6(2)
ipNetToPhysicalNetAddress	eCM IP Address
ipNetToPhysicalLastUpdated	<refer to [RFC4293]>
ipNetToPhysicalType	static(4)
ipNetToPhysicalState	<refer to [RFC4293]>
ipNetToPhysicalRowStatus	'active'

6.2.4.4 eUE USM Requirements

This section presents the PacketCable 2.0 eUE USM requirements. Please refer to [RFC3414] for more information on the User-based Security Model (USM) for SNMPv3.

An eUE, provisioned in the Secure Provisioning Flow, MUST configure the usmUserTable immediately after receiving the AP REPLY from the Provisioning Server, with the entry specified in Table 3.

Table 3 - eUE usmUserTable Entry

usmUserTable ([RFC3414] [IETF STD62])	Row Entry
usmUserEngineID	The SNMP local engine id
usmUserName	eUE-Prov-xx:xx:xx:xx:xx:xx, where xx:xx:xx:xx:xx:xx represents the eUE's Mac address
usmUserSecurityName	eUE-Prov-xx:xx:xx:xx:xx:xx, where xx:xx:xx:xx:xx:xx represents the eUE's Mac address
usmUserCloneFrom	0.0
usmUserAuthProtocol	usmHMACMD5AuthProtocol or usmHMACSHAAuthProtocol
usmUserAuthKeyChange	""
usmUserOwnAuthKeyChange	""
usmUserPrivProtocol	usmDESPrivProtocol if privacy is indicated in AP REPLY usmNoPrivProtocol if privacy is not indicated in the AP REPLY
usmUserPrivKeyChange	""
usmUserOwnPrivKeyChange	""
usmUserPublic	""
usmUserStorageType	volatile

usmUserTable ([RFC3414][IETF STD62])	Row Entry
usmUserStatus	active

Initial authentication and privacy keys for this user are derived from the AP Reply message. The eUE MUST allow for cloning of users as specified in [IETF STD62]. This can be accomplished using the configuration file, or dynamically through SNMP SET operations.

6.2.4.5 eUE VACM Requirements

This section presents the PacketCable 2.0 eUE VACM requirements. For more information regarding View-based Access Control Model (VACM) for SNMP, please refer to [RFC3415].

The eUE MUST configure the VacmSecurityToGroupTable with the entry specified in Table 4.

Table 4 - eUE VacmSecurityToGroupTable

vacmSecurityToGroupTable ([RFC3415])	Row Entry
vacmSecurityModel	USM
vacmSecurityName	eUE-Prov-xx:xx:xx:xx:xx:xx
vacmGroupName	PacketCableFullAccess
vacmSecurityToGroupStorageType	volatile
vacmSecurityToGroupStatus	active

The eUE MUST configure the vacmAccessTable with the entry specified in Table 5 and the associated requirements that follow. This configuration allows for read access of all MIB modules in the eUE, write access to PacketCable 2.0 eUE MIB modules, and notifications as specified in the PacketCable 2.0 eUE MIB modules.

Table 5 - eUE vacmAccessTable

vacmAccessTable ([RFC3415])	Row Entry
vacmGroupName	PacketCableFullAccess
vacmAccessContextPrefix	""
vacmAccessSecurityModel	USM
vacmAccessSecurityLevel	authPriv or authNoPriv (depending on whether privacy has been specified)
vacmAccessContextMatch	exact
vacmAccessReadViewName	ReadOnlyView
vacmAccessWriteViewName	FullAccessView
vacmAccessNotifyViewName	NotifyView
vacmAccessStorageType	volatile
vacmAccessStatus	active

The following requirements are associated with Table 5.

- The eUE's ReadOnlyView MUST consist of the entire MIB tree contained in the eUE.
- The eUE's FullAccessView MUST consist of all the PacketCable-specified MIB modules, the MIB-II system group, and the IF-MIB tree.
- The eUE's FullAccessView MAY include vendor-specific MIBs, VACM, USM, and Notifications MIB.
- The eUE's NotifyView MUST consist of all the PacketCable 2.0 specified MIB modules, the MIB-II system group, and the snmpTrapOID MIB tree.
- The eUE's NotifyView MAY include vendor-specific MIB trees.

6.2.4.6 SNMPv2c Management Requirements

The eUE MUST follow the SNMPv2c management requirements as specified in [PKT-SP-PROV1.5], "SNMPV2C MANAGEMENT REQUIREMENTS," with the following clarifications:

- The requirements applicable to the eMTA apply to the eUE.
- The string (or substring) "mta" is replaced with "eue" in snmpCommunityIndex, snmpCommunitySecurityName, snmpCommunityTransportTag, snmpTargetAddrName, snmpTargetAddrTagList, snmpTargetAddrParams, vacmSecurityName, vacmGroupName, vacmAccessReadViewName, vacmAccessWriteViewName, vacmAccessNotifyViewName, vacmViewTreeFamilyViewName, snmpTargetParamsName, snmpTargetParamsSecurityName, snmpNotifyName, snmpNotifyTag, snmpNotifyFilterProfileName and snmpNotifyFilterSubtree.
- Any references to MIB modules, such as pktcMtaNotification within the snmpNotifyFilterTable, applies to the PacketCable 2.0 E-UE MIB modules.

6.3 Configuration Data Element Requirements

The eCM MUST comply with the DOCSIS and eDOCSIS configuration data element requirements, including mandatory, optional, and prohibited MIB Objects. The eUE MUST report any configuration data elements deemed mandatory, and not provided in the respective configuration file.

6.3.1 Configuration File Requirements

This section provides the configuration data element requirements.

Table 6 - eUE Configuration Data Element Requirements

MIB Module (CL-PKTC-)	Data Element	Requirement	Additional Details
EUE-PROV-MGMT-MIB	pktcMtaDevEnabled	Mandatory	This element is always required.
EUE-PROV-MGMT-MIB	pktcMtaDevRealmOrgName	Conditionally Mandatory	This element is mandatory in the Secure Provisioning Flow.
EUE-DEV-MIB	pktcEUEDevOpTable	Conditionally Mandatory	One table entry is mandatory if the eUE has any active users associated with it.
EUE-DEV-MIB	pktcEUEDevDnsTable	Conditionally Mandatory	One table entry is mandatory if the eUE has any active users associated with it.
EUE-DEV-MIB	pktcEUEDevPCSCFTable	Conditionally Mandatory	One table entry is mandatory if the eUE has any active users associated with it.
EUE-USER-MIB	pktcEUEUsrIMPTable	Conditionally Mandatory	One table entry is mandatory if the eUE has any active users associated with it.
EUE-USER-MIB	pktcEUEUsrIMPTable	Conditionally Mandatory	One table entry is mandatory if the eUE has any active users which need authentication for registration.
EUE-USER-MIB	pktcEUEUsrAppMapTable	Conditionally Mandatory	One table entry is mandatory if any active user has any applications associated with it.

6.3.2 Certificate Bootstrapping File Requirements

This section provides the Certificate Bootstrapping configuration data element requirements. An eUE that supports Certificate Bootstrapping MUST be capable of accepting the contents of an XML instance document that complies with the XML Schema specified in Annex D.1. A Certificate Bootstrapping Server that provides Certificate Bootstrapping MUST support XML instance documents that comply with the XML Schema specified in Annex D.1, and the data element requirements in Table 7.

Once an eUE receives an XML instance document during the Certificate Bootstrapping process, the eUE MUST make sure that it complies with the data element and attributes requirements stated in Table 7. If the Certificate Bootstrapping XML instance document complies with the stated requirements the eUE MUST process the XML instance data elements and modify the pktcEUEUsrIMPITable accordingly. The eUE MUST validate the XML instance document prior to acceptance or modification of the MIB table 'pktcEUEUsrIMPITable'. If the received Certificate Bootstrapping XML instance document is valid the eUE MUST process the document. If the Configuration File XML instance document fails to meet the requirements stated in Appendix D.1 or Table 7, then the eUE MUST ignore the Certificate Bootstrapping XML instance document and report the appropriate events (specified in Table 8), and continue to support PacketCable applications as configured.

When the data element 'clearIMPIMIBTable' is present and set to a value of 'true', the eUE MUST process it prior to any IMPI elements and clear all the entries in the MIB table pktcEUEUsrIMPITable. The attribute 'mibIMPIIndex' provides the index value reference to the MIB table 'pktcEUEUsrIMPITable'. Irrespective of the current row entry corresponding to that index, the eUE MUST update it with the information provided during Certificate Bootstrapping. If there are row entries in the MIB table 'pktcEUEUsrIMPITable' that are not present in the Certificate Bootstrapping XML instance file, the eUE MUST NOT modify them in any way as a result of the Certificate Bootstrapping process.

The Certificate Bootstrapping procedure may result in duplicate IMPI entries, e.g., if the entries provided previously are not cleared using the element 'clearIMPIMIBTable'. In such cases, the eUE MUST still accept a valid Certificate Bootstrapping XML instance and report the appropriate event as specified in the IMPI MIB table (see Table 8 for the actual event).

Table 7 - eUE Configuration Bootstrapping File Requirements

XML Schema	Data Element or Attribute	Requirement	Additional Details
D.1	//clearIMPIMIBTable	Mandatory, if '//IMPI' is absent.	If this element is absent, then the eUE will not clear the IMPI table.
D.1	//IMPI	Mandatory, if '//clearIMPIMIBTable' is absent.	An IMPI element is required for each IM Private Identifier (IMPI) that is being specified.
D.1	//IMPI/@mibIMPIIndex	Mandatory if the element '//IMPI' is present.	A mibIMPIIndex attribute is required for each IMPI/ID element.
D.1	//IMPI/ID	Mandatory if the element '//IMPI' is present.	An ID element is required for each IMPI that is being specified.
D.1	//IMPI/Creds	Mandatory if the element '//IMPI' is present.	A Creds element is required for each IMPI that is being specified.
D.1	//IMPI/ID/@idType	Mandatory if the element '//IMPI' is present.	An idType attribute is required for each IMPI/ID element.
D.1	//IMPI/Creds/@credsType	Mandatory if the element '//IMPI' is present.	A credsType attribute is required for each IMPI/Creds element. When the attribute 'credsType' indicates 'none', it implies that the corresponding IMPI is not associated with any credentials (however, this should not affect the use of the IMPI for purposes such as registration).

6.4 Management Event Reporting Requirements

The E-UE MUST support all the Management Events specified in [PKT-MEM1.5], Table 4, except for the following:

- PROV-EV-12
- PROV-EV-12.1
- PROV-EV-13
- PROV-EV-13.1
- PROV-EV-14
- PROV-EV-14.1

In addition, the eUE MUST support the management events specified in Table 8.

Table 8 - Additional eUE Management Events

Event Name	Default Severity for Event	Default Display String	PacketCable Event ID	Comments
EUE-EV-1	error	"Registration did not comply with SigSecurity configuration for user <user IMPU>"	4000960000	The eUE MUST report this event if the directive specified in pktcEUEUsrIMPUSigSecurity is not met during registration of a user IMPU.
EUE-EV-2	critical	"Registration failed for user IMPU=<user IMPU>; IMPI=<user IMPI>; reason <reason>"	4000960001	The eUE MUST report this event if the registration for a specific user failed. The eUE MUST populate <user IMPU> with the user's IMPU and <user IMPI> with the user's IMPI.
EUE-EV-3	informational	"Certificate Bootstrapping Success"	4000960002	The eUE MUST report this event if a Certificate Bootstrapping procedure that was initiated was successfully completed.
EUE-EV-4	critical	"Certificate Bootstrapping Failure"	4000960003	The eUE MUST report this event if a Certificate Bootstrapping procedure was not successfully completed.
EUE-EV-5	critical	"Time unavailable from the ToD Server - Secure flow"	4000960004	The eUE MUST report this event if ToD is not available by the moment when the eUE completes its DHCP process and is required to attempt secure provisioning flow.
EUE-EV-6	warning	"Time unavailable from the ToD Server - Basic or Hybrid flow."	4000960005	The eUE MUST report this event if ToD is not available by the moment when the eUE completes its DHCP process and is required to attempt Basic or Hybrid provisioning flows.
EUE-EV-7	warning	"New time has been retrieved from ToD server."	4000960006	The eUE MUST report this event when the new value of the ToD has been retrieved for any reason, e.g., the ToD Server has been modified, the change of the Time Offset value in the corresponding DHCP option, or a previously non-responsive ToD Server becomes responsive.
EUE-EV-8	error	"Certificate Bootstrapping XML instance does not comply with the supported XML Schema"	4000960007	The eUE MUST report this event if it supports Certificate Bootstrapping and receives a Certificate Bootstrapping XML instance document that does not comply with the XML Schema specified in Annex D.1.
EUE-EV-9	error	"Certificate Bootstrapping XML instance document is compliant, but contains errors"	4000960008	The eUE MUST report this event if it supports Certificate Bootstrapping and receives a Certificate Bootstrapping XML instance document that complies with the XML Schema specified in Annex D.1, but the data elements do not meet the requirements specified in Table 7, or the data element values contain errors.
EUE-EV-10	warning	"Warning: Inconsistency in Table <X>." ;Where X is the name of the MIB table with inconsistencies.	4000960009	The eUE MUST report this event for inconsistencies in any MIB table that identifies potential inconsistencies that need to be reported as a warning, for example, unavailable IMPI index references in the IMPU table.

Event Name	Default Severity for Event	Default Display String	PacketCable Event ID	Comments
EUE-EV-11	Informational	"Info: Inconsistency in Table <X>." ;Where X is the name of the MIB table with inconsistencies.	4000960010	The eUE MUST report this event for inconsistencies in any MIB table that identifies potential inconsistencies that need to be reported as informational events, or are not explicitly required to be reported as 'warnings' within the MIB table description.

Annex A PacketCable eUE Common Modules

A.1 Textual Conventions MIB Module

```

CL-PKTC-EUE-TC-MIB DEFINITIONS ::= BEGIN

IMPORTS
    MODULE-IDENTITY,
    Unsigned32
        FROM SNMPv2-SMI
    TEXTUAL-CONVENTION
        FROM SNMPv2-TC
    pktcEUEMibs
        FROM CLAB-DEF-MIB;

pktcEUETCMIB MODULE-IDENTITY
    LAST-UPDATED "200807100000Z" -- July 10, 2008
    ORGANIZATION "Cable Television Laboratories, Inc."
    CONTACT-INFO
        "Broadband Network Services
        Cable Television Laboratories, Inc.
        858 Coal Creek Circle,
        Louisville, CO 80027, USA
        Phone: +1 303-661-9100
        Email: mibs@cablelabs.com

        Acknowledgements:
        Thomas Clack, Broadcom - Primary author,
        Sumanth Channabasappa, CableLabs
        Eduardo Cardona, CableLabs
        and members of the PacketCable PACM Focus Team."
    DESCRIPTION
        "This MIB module specifies the TEXTUAL CONVENTIONS
        for use in the definition of PacketCable E-UE
        MIB Objects."
    REVISION "200807100000Z" -- July 10, 2008
    DESCRIPTION
        "Revised Version includes ECN EUE-DATA-N-08.0524-5
        and published as I02"
    REVISION "200711060000Z" -- Nov 6, 2007
    DESCRIPTION
        "Initial version, published as part of the CableLabs
        E-UE Provisioning Data Model Specification
        PKT-SP-EUE-DATA-I01-071106
        Copyright 1999-2008 Cable Television Laboratories, Inc.
        All rights reserved."

    ::= { pktcEUEMibs 2 }

-- Administrative assignments
pktcEUETCNotifications OBJECT IDENTIFIER ::= { pktcEUETCMIB 0 }
pktcEUETCObjects OBJECT IDENTIFIER ::= { pktcEUETCMIB 1 }
pktcEUETCConformance OBJECT IDENTIFIER ::= { pktcEUETCMIB 2 }

pktcEUETCCompliances OBJECT IDENTIFIER ::= { pktcEUETCConformance 1 }
pktcEUETCGroups OBJECT IDENTIFIER ::= { pktcEUETCConformance 2 }

-- MIB Objects
pktcEUETCUsageObjs OBJECT IDENTIFIER ::= { pktcEUETCObjects 1 }

-----
-- TEXTUAL CONVENTION for defining EUE Identifiers
-----
PktcEUETCID ::= TEXTUAL-CONVENTION

```

STATUS current

DESCRIPTION

" This TEXTUAL CONVENTION is being defined to contain identities that can be used within the PacketCable eUE data models.

It specifies a hex string that can be used to represent the various identities.

The types of possible identities are specified by the TEXTUAL CONVENTION 'PktcEUETCIDType'.

The following rules apply:

- All identities, except macaddress refer to either UEs or Users.
Mac addresses are UE specific
- When used as a pair, the public and private identities MUST be separated by a '#', with the private identity following the public identity."

SYNTAX OCTET STRING(SIZE(0..1023))

-- TEXTUAL CONVENTION for defining EUE Identifier type

PktcEUETCIDType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

" This TEXTUAL CONVENTION is being defined as a way of indicating an identity specified by MIB Objects utilizing the TEXTUAL CONVENTION 'PktcEUETCID'.

The defined types include:

- other(1)
for types not described by the options provided below
- gruu(2)
for Globally Routable User Agent (UA) URIs
- publicIdentity(3)
for Public Identities as defined by PacketCable
- privateIdentity(4)
for Private Identities as defined by PacketCable
- publicPrivatePair(5)
for Public and Private Identity pairs as defined by PacketCable
- username(6)
for username and password as defined by PacketCable
- macaddress(7)
for mac addresses
- packetcableIdentity(8)
for PacketCable specific types

UE implementations must ensure that PktcEUETCIDType objects and any dependent objects (e.g., PktcEUETCID objects) are consistent.

In general, the UE MUST generate an 'inconsistentValue' error if an attempt to change a PktcEUETCIDType object would, for example, lead to an undefined PktcEUETCID value.

In particular, PktcEUETCIDType/PktcEUEID pairs MUST be changed together."

SYNTAX INTEGER {

```

        other(1),
        gruu(2),
        publicIdentity(3),
        privateIdentity(4),
        publicPrivatePair(5),
        username(6),
        macaddress(7),
        packetcableIdentity(8)
    }

```

```

-----
-- TEXTUAL CONVENTION for defining activation status
-----

```

```

PktcEUETCAdminStatus ::= TEXTUAL-CONVENTION
    STATUS current
    DESCRIPTION
        " This TEXTUAL CONVENTION is being defined to
        indicate activation status as defined in
        PacketCable.
        A value of 'active' indicates a status
        of active.
        A value of 'inactive' indicates a status
        of inactive."
    SYNTAX    INTEGER {
        active(1),
        inactive(2)
    }

```

```

PktcEUETCOperStatus ::= TEXTUAL-CONVENTION
    STATUS current
    DESCRIPTION
        " This TEXTUAL CONVENTION is being defined to
        indicate operational activation status as defined in
        PacketCable.
        A value of 'active' indicates a status
        of active.
        A value of 'inactive' indicates a status
        of inactive.
        A value of 'notPresent' indicates the particular
        activation status is not supported.
        A value of 'unknown' indicates the activation status
        could not be determine by the other values."
    SYNTAX    INTEGER {
        active(1),
        inactive(2),
        notPresent(3),
        unknown(4)
    }

```

```

-----
-- TEXTUAL CONVENTION for defining activation status info
-----

```

```

PktcEUETCStatusInfo ::= TEXTUAL-CONVENTION
    STATUS current
    DESCRIPTION
        " This TEXTUAL CONVENTION is being defined to provide
        additional activation status information."
    SYNTAX    OCTET STRING (SIZE(0..31))

```

```

-----
-- TEXTUAL CONVENTION for User Element Indices
-----

```

```

PktcEUETCUsrElementIndexType ::= TEXTUAL-CONVENTION
    STATUS current
    DESCRIPTION
        " This TEXTUAL CONVENTION is being defined to
        indicate any indices related to users, such as IMPUS

```

and IMPIs, as defined in PacketCable.
Such an instance can be referenced across
tables to indicate an association.

The values assigned for objects of this type SHOULD
be sequential starting with the value of 1 and
incrementing by 1 for each User. A value of '0',
if allowed MUST be specified in the DESCRIPTION of
any MIB Object using this data type."

SYNTAX Unsigned32 (0..63)

-- TEXTUAL CONVENTION for defining App Org

PktcEUETCAppOrgIdentifier ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

" This TEXTUAL CONVENTION is being defined to
identify the organization specifying
a particular application.

Any MIB Object specified to be of this type
MUST represent the IANA assigned Enterprise number.

For CableLabs specified applications, it MUST be
4491."

REFERENCE "http://www.iana.org/assignments/enterprise-numbers"

SYNTAX Unsigned32

-- TEXTUAL CONVENTION for defining App Identifier

PktcEUETCAppIdentifier ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

" This TEXTUAL CONVENTION is being defined to
identify the application id assigned by an
organization.
Each organization planning to specify an application
MUST publish a registry which identifies each application
and the corresponding ID that can be referenced."

SYNTAX Unsigned32(1..127)

-- TEXTUAL CONVENTION for App Indices

PktcEUETCUsrAppIndexType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

" This TEXTUAL CONVENTION is being defined to
indicate any indices related to PacketCable Applications.

The values assigned for objects of this type SHOULD
be sequential starting with the value of 1 and
incrementing by 1 for each User. A value of '0',
if allowed MUST be specified in the DESCRIPTION of
any MIB Object using this data type."

SYNTAX Unsigned32 (0..31)

-- TEXTUAL CONVENTION for defining Credentials

PktcEUETCCredsType ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

" This TEXTUAL CONVENTION represents credential

types. Each definition of PktcEUECCredsType MUST be accompanied by a definition of the textual convention PktcEUECCreds.

The specified types include:

- other(1)
An unknown credentials type. It MAY be used to indicate Credentials that are not in one of the formats defined below such as a vendor-specific format.
- none(2)
A non-existent credentials type. This value MUST be used if the value of the corresponding PktcEUECCreds object is a zero-length string. It MAY be used when the credentials are no longer valid.
- password(3)
A password based credential. When this type is used the credential value contained in PktcEUECCreds MUST be an ASCII string representing a user-readable password.
- preSharedKey(4)
A pre-shared key based credential. When this type is used the credential value contained in PktcEUECCreds MUST be interpreted as a pre-shared key represented as an octet string.
- X509certificate(5)
A certificate based credential. When this type is used the credential value contained in PktcEUECCreds MUST be interpreted as a private key and an accompanying X.509 certificate.

Implementations must ensure that objects with SYNTAX of 'PktcEUECCredsType' and dependent objects with SYNTAX of 'PktcEUECCreds' are consistent.

In general, the UE MUST generate an 'inconsistentValue' error if an attempt to change an 'PktcEUECCredsType' object would, for example, lead to an undefined 'PktcEUECCreds' value."

```
SYNTAX    INTEGER {
                other(1),
                none(2),
                password(3),
                preSharedKey(4),
                certificate(5)
            }
```

PktcEUECCreds ::= TEXTUAL-CONVENTION

STATUS current

DESCRIPTION

" This TEXTUAL CONVENTION allows for the definition of a credential.

A PktcEUECCreds value must always be associated with and interpreted within the context of a corresponding PktcEUECCredsType.

The value of a PktcEUECCreds object must be consistent with the value of its associated PktcEUECCredsType object. Any attempt to SET an object when these values are not consistent must fail with an inconsistentValue

error.

An object of this type MUST be interpreted as follows
(in network byte order):

Bytes 0-1: Reserved. The application must define the
usage of these bytes.

Bytes 2-3: Indicate the length of the credential value.

Bytes 4-8191: Contain the credential value."

SYNTAX OCTET STRING (SIZE (0..8192))

END

Annex B PacketCable eUE Device Configuration Modules

B.1 Device Configuration MIB Module

CL-PKTC-EUE-DEV-MIB DEFINITIONS ::= BEGIN

IMPORTS

PktcEUECCredsType,
PktcEUECCreds

FROM CL-PKTC-EUE-TC-MIB

MODULE-IDENTITY,
OBJECT-TYPE,
Unsigned32

FROM SNMPv2-SMI

OBJECT-GROUP,
MODULE-COMPLIANCE

FROM SNMPv2-CONF

TEXTUAL-CONVENTION,
RowStatus,
TruthValue

FROM SNMPv2-TC

SnmAdminString

FROM SNMP-FRAMEWORK-MIB

InetAddress,
InetAddressPortNumber,
InetAddressDNS,
InetAddressType

FROM INET-ADDRESS-MIB

pktcEUEMibs

FROM CLAB-DEF-MIB;

pktcEUEDevMIB MODULE-IDENTITY

LAST-UPDATED "200807100000Z" -- July 10, 2008

ORGANIZATION "Cable Television Laboratories, Inc."

CONTACT-INFO

"Broadband Network Services
Cable Television Laboratories, Inc.
858 Coal Creek Circle,
Louisville, CO 80027, USA
Phone: +1 303-661-9100
Email: mibs@cablelabs.com

Acknowledgements:

Thomas Clack, Broadcom - Primary author,
Eugene Nechamkin, Broadcom
Sumanth Channabasappa, CableLabs
John Berg, CableLabs
Eduardo Cardona, CableLabs
and members of the PacketCable PACM Focus Team."

DESCRIPTION

"This MIB module contains Configuration MIB
objects for the Embedded User Equipment (eUE) as
required by the PacketCable E-UE Provisioning
Framework Specification."

REVISION "200807100000Z" -- July 10, 2008

DESCRIPTION

"Revised Version includes ECN EUE-DATA-N-08.0524-5
and published as I02"

REVISION "200711060000Z" -- Nov 6, 2007

DESCRIPTION

"Initial version, published as part of the CableLabs
E-UE Provisioning Data Model Specification

```

        PKT-SP-EUE-DATA-I01-071106
        Copyright 1999-2007 Cable Television Laboratories, Inc.
        All rights reserved."
    ::= { pktcEUEMibs 3 }

-----
-- Pktc EUE DEV Textual Conventions
-----

PktcEUEDevSipProtID ::= TEXTUAL-CONVENTION
    STATUS current
    DESCRIPTION
        "This TEXTUAL CONVENTION is being defined
        as a way to enumerate the Protocols used for SIP."
    SYNTAX INTEGER {
        other(1),
        udp(2),
        tcp(3),
        tls(4)
    }

-- Administrative assignments
pktcEUEDevNotification OBJECT IDENTIFIER ::= { pktcEUEDevMIB 0 }
pktcEUEDevObjects      OBJECT IDENTIFIER ::= { pktcEUEDevMIB 1 }
pktcEUEDevConformance OBJECT IDENTIFIER ::= { pktcEUEDevMIB 2 }

pktcEUEDevCompliances  OBJECT IDENTIFIER ::= { pktcEUEDevConformance 1 }
pktcEUEDevGroups       OBJECT IDENTIFIER ::= { pktcEUEDevConformance 2 }

-----
-- eUE Profile Information
-----
pktcEUEDevProfile      OBJECT IDENTIFIER ::= { pktcEUEDevObjects 1 }

pktcEUEDevProfileVersion OBJECT-TYPE
    SYNTAX      SnmpAdminString(SIZE(0..6))
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        " This MIB Object represents the Device Profile Version for this
        MIB module. The eUE MUST set this MIB Object to a value of '1.0'."
    ::= { pktcEUEDevProfile 1 }

-----
-- Operator Table
-----
pktcEUEDevOpTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF PktcEUEDevOpEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        " This data table contains Operator specific information
        associated with the eUE."
    ::= { pktcEUEDevProfile 2 }

pktcEUEDevOpEntry OBJECT-TYPE
    SYNTAX      PktcEUEDevOpEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        " Each entry in this data table describes Operator
        parameters associated with a specific domain name.

```

For each Operator that is associated with a user, the corresponding parameters SHOULD be configured by the Operator.

A domain name of '.' indicates any domain name.

The eUE MUST use the values provided only for sessions established on behalf of the eUE identifier (e.g. eUE registration, eUE configuration, eUE Identifier based sessions)."

```
INDEX { pktcEUEDevOpIndex }
::= { pktcEUEDevOpTable 1 }
```

```
PktcEUEDevOpEntry ::=
```

```
SEQUENCE {
    pktcEUEDevOpIndex          Unsigned32,
    pktcEUEDevOpDomain         InetAddressDNS,
    pktcEUEDevOpSTUNAddrType   InetAddressType,
    pktcEUEDevOpSTUNAddr       InetAddress,
    pktcEUEDevOpSTUNAddrPort   InetPortNumber,
    pktcEUEDevOpSTUNRelayAddrType InetAddressType,
    pktcEUEDevOpSTUNRelayAddr  InetAddress,
    pktcEUEDevOpSTUNRelayAddrPort InetPortNumber,
    pktcEUEDevOpSTUNRelayCredsType PktcEUEETCCredsType,
    pktcEUEDevOpSTUNRelayCreds  PktcEUEETCCreds,
    pktcEUEDevOpRowStatus      RowStatus
}
```

```
pktcEUEDevOpIndex OBJECT-TYPE
```

```
SYNTAX      Unsigned32(1..16)
```

```
MAX-ACCESS  not-accessible
```

```
STATUS      current
```

```
DESCRIPTION
```

" A unique value used to identify an instance of a set of values pertaining to an Operator domain identified by 'pktcEUEDevOpDomain'. The indices SHOULD be contiguous. When multiple entries are specified, the eUE MUST give precedence to the values indexed by lower indices."

```
::= { pktcEUEDevOpEntry 1 }
```

```
pktcEUEDevOpDomain OBJECT-TYPE
```

```
SYNTAX      InetAddressDNS
```

```
MAX-ACCESS  read-create
```

```
STATUS      current
```

```
DESCRIPTION
```

" This data element contains the Operator's Domain or sub-domain name. A value of '.' indicates any domainName."

```
::= { pktcEUEDevOpEntry 2 }
```

```
pktcEUEDevOpSTUNAddrType OBJECT-TYPE
```

```
SYNTAX      InetAddressType
```

```
MAX-ACCESS  read-create
```

```
STATUS      current
```

```
DESCRIPTION
```

" This data element identifies the data type of the value contained in 'pktcEUEDevOpSTUNAddr'."

```
DEFVAL      { unknown }
```

```
::= { pktcEUEDevOpEntry 3 }
```

```
pktcEUEDevOpSTUNAddr OBJECT-TYPE
```

```
SYNTAX      InetAddress
```

```
MAX-ACCESS  read-create
```

```
STATUS      current
```

DESCRIPTION

" This data element contains the STUN server address associated with the domain name identified in 'pktcEUEDevOpDomain'."

DEFVAL { "" }

::= { pktcEUEDevOpEntry 4 }

pktcEUEDevOpSTUNAddrPort OBJECT-TYPE

SYNTAX InetPortNumber

MAX-ACCESS read-create

STATUS current

DESCRIPTION

" This data element contains the STUN server port associated with the server address identified in 'pktcEUEDevOpSTUNAddr'."

DEFVAL { 0 }

::= { pktcEUEDevOpEntry 5 }

pktcEUEDevOpSTUNRelayAddrType OBJECT-TYPE

SYNTAX InetAddressType

MAX-ACCESS read-create

STATUS current

DESCRIPTION

" This data element identifies the data type of the value contained in 'pktcEUEDevOpSTUNRelayAddr'."

DEFVAL { unknown }

::= { pktcEUEDevOpEntry 6 }

pktcEUEDevOpSTUNRelayAddr OBJECT-TYPE

SYNTAX InetAddress

MAX-ACCESS read-create

STATUS current

DESCRIPTION

" This data element contains the STUNRelay server address associated with the domain name identified in 'pktcEUEDevOpDomain'."

DEFVAL { "" }

::= { pktcEUEDevOpEntry 7 }

pktcEUEDevOpSTUNRelayAddrPort OBJECT-TYPE

SYNTAX InetPortNumber

MAX-ACCESS read-create

STATUS current

DESCRIPTION

" This data element contains the STUNRelay server port associated with the server address identified in 'pktcEUEDevOpSTUNRelayAddr'."

DEFVAL { 0 }

::= { pktcEUEDevOpEntry 8 }

pktcEUEDevOpSTUNRelayCredsType OBJECT-TYPE

SYNTAX PktcEUEETCCredsType

MAX-ACCESS read-create

STATUS current

DESCRIPTION

" This data element contains the creds type associated with the STUN Relay creds identified in 'pktcEUEDevOpSTUNRelayCreds'.
Valid types include other(1), publicIdentity(2) and username(6)."

DEFVAL { none }

::= { pktcEUEDevOpEntry 9 }

```

pktcEUEDevOpSTUNRelayCreds OBJECT-TYPE
    SYNTAX      PktcEUEETCCreds
    MAX-ACCESS   read-create
    STATUS       current
    DESCRIPTION
        " This optional data element MAY contain suitable credentials
          related to STUN Relay access.

          If read this data element MUST always return an empty
          string value."
    DEFVAL      { "" }
    ::= { pktcEUEDevOpEntry 10 }

pktcEUEDevOpRowStatus OBJECT-TYPE
    SYNTAX      RowStatus
    MAX-ACCESS   read-create
    STATUS       current
    DESCRIPTION
        " This object defines the row status associated with the
          particular Operator in the pktcEUEDevOpTable.

          The value of this object has no effect on
          whether columnar objects in this row can be modified."
    ::= { pktcEUEDevOpEntry 11 }

-----
-- Operator domain names associated with a eUE
-----
pktcEUEDevDnsTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF PktcEUEDevDnsEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        " This data table represents the eUE's knowledge
          of suitable DNS Server information on a per Operator
          basis.

          The eUE MUST use the values provided only for sessions
          established on behalf of the eUE identifier (e.g. eUE P-CSCF Discovery,
          eUE registration, eUE configuration, eUE Identifier based sessions)."

    ::= { pktcEUEDevProfile 3 }

pktcEUEDevDnsEntry OBJECT-TYPE
    SYNTAX      PktcEUEDevDnsEntry
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        " Each entry in this data table contains an instance
          of a DNS Server entry for a given domain name as
          indicated by 'pktcEUEDevOpDomain'.

          The information in this table MAY be configured
          by the Operator."
    INDEX      { pktcEUEDevOpIndex, pktcEUEDevDnsIndex }
    ::= { pktcEUEDevDnsTable 1 }

PktcEUEDevDnsEntry ::=
    SEQUENCE {
        pktcEUEDevDnsIndex      Unsigned32,
        pktcEUEDevDnsAddrType   InetAddressType,
        pktcEUEDevDnsAddr       InetAddress,
        pktcEUEDevDnsRowStatus  RowStatus
    }

```

```

pktcEUEDevDnsIndex OBJECT-TYPE
    SYNTAX      Unsigned32(1..16)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        " A unique value used to identify an instance in this
          data table. The indices SHOULD be contiguous.
          When multiple entries are specified, the eUE MUST give
          precedence to the values indexed by lower indices."
    ::= { pktcEUEDevDnsEntry 1 }

pktcEUEDevDnsAddrType OBJECT-TYPE
    SYNTAX      InetAddressType
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " This data element contains the type of the data
          element contained in 'pktcEUEDevDnsAddr'.
          The only valid values are 'ipv4' or 'ipv6'.
          The value 'unknown' may be used for row creation
          if the value of 'pktcEUEDevDnsAddr' is not specified."
    DEFVAL     { unknown }
    ::= { pktcEUEDevDnsEntry 2 }

pktcEUEDevDnsAddr OBJECT-TYPE
    SYNTAX      InetAddress
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " The IP address of a DNS server associated with
          the domain name indicated by the primary index
          'pktcEUEDevOpIndex', for the instance indicated
          by the secondary index 'pktcEUEDevDnsIndex'.
          In the case this object is empty the eUE MUST use
          the DNS servers obtained via the DHCP process during
          provisioning."
    DEFVAL     { "" }
    ::= { pktcEUEDevDnsEntry 3 }

pktcEUEDevDnsRowStatus OBJECT-TYPE
    SYNTAX      RowStatus
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " This object defines the row status associated with the
          particular Operator domain name in the pktcEUEDevDnsTable.

          The value of the 'pktcEUEDevDnsAddrType' object MUST not be
          modified while this object is 'active'. The value of
          'pktcEUEDevDnsAddr' MAY be modified while this object is active
          if the value is consistent with the type specified by the
          'pktcEUEDevDnsAddrType' object. The eUE MUST not allow the
          row to become 'active' unless the value of 'pktcEUEDevDnsAddr'
          is consistent with the value of 'pktcEUEDevDnsAddrType'"
    ::= { pktcEUEDevDnsEntry 4 }

-- -----
-- P-CSCFs associated with the eUE
-- -----
pktcEUEDevPCSCFTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF PktcEUEDevPCSCFEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        " This data table represents the eUE's knowledge
          of suitable P-CSCFs information on a per Operator

```



```

        basis."

        ::= { pktcEUEDevProfile 4 }

pktcEUEDevPCSCFEntry OBJECT-TYPE
    SYNTAX      PktcEUEDevPCSCFEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        " Each entry in this data table contains an instance
          of a P-CSCF Server entry for a given domain name.
          The information in this table MAY be configured
          by the Operator.

          The eUE MUST use the values provided only for sessions
          established on behalf of the eUE identifier (e.g. eUE registration,
          eUE configuration, eUE Identifier based sessions)."

    INDEX { pktcEUEDevOpIndex, pktcEUEDevPCSCFIndex }
    ::= { pktcEUEDevPCSCFTable 1 }

PktcEUEDevPCSCFEntry ::=
    SEQUENCE {
        pktcEUEDevPCSCFIndex                Unsigned32,
        pktcEUEDevPCSCFAddrType              InetAddressType,
        pktcEUEDevPCSCFAddr                  InetAddress,
        pktcEUEDevPCSCFSipPort                InetPortNumber,
        pktcEUEDevPCSCFUsedProtocol           PktcEUEDevSipProtID,
        pktcEUEDevPCSCFUsedInetAddressType   InetAddressType,
        pktcEUEDevPCSCFUsedInetAddress       InetAddress,
        pktcEUEDevPCSCFTimerT1                Unsigned32,
        pktcEUEDevPCSCFTimerT2                Unsigned32,
        pktcEUEDevPCSCFTimerT4                Unsigned32,
        pktcEUEDevPCSCFTimerTD                Unsigned32,
        pktcEUEDevPCSCFRowStatus              RowStatus
    }

pktcEUEDevPCSCFIndex OBJECT-TYPE
    SYNTAX      Unsigned32(1..16)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        " A unique value used to identify an instance in this
          data table. The indices SHOULD be contiguous.
          When multiple entries are specified, the eUE MUST give
          precedence to the values indexed by lower indices."

    ::= { pktcEUEDevPCSCFEntry 1 }

pktcEUEDevPCSCFAddrType OBJECT-TYPE
    SYNTAX      InetAddressType
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " This data element contains the type of the data
          element contained in 'pktcEUEDevPCSCFAddr'."

    DEFVAL { unknown }
    ::= { pktcEUEDevPCSCFEntry 2 }

pktcEUEDevPCSCFAddr OBJECT-TYPE
    SYNTAX      InetAddress
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " The IP address of a P-CSCF server associated with
          the domain name indicated by the primary index

```

```

        'pktcEUEDevOpIndex', for the instance indicated
        by the secondary index 'pktcEUEDevPCSCFIndex'."

DEFVAL    { "" }
 ::= { pktcEUEDevPCSCFEntry 3 }

pktcEUEDevPCSCFSipPort      OBJECT-TYPE
SYNTAX      InetPortNumber
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    " This MIB Object contains a SIP Port to send the
      SIP requests to (for the P-CSCF indicated by the
      table entry)."
DEFVAL      { 5060 }
 ::= { pktcEUEDevPCSCFEntry 4 }

pktcEUEDevPCSCFUsedProtocol OBJECT-TYPE
SYNTAX      PktcEUEDevSipProtID
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    " This MIB Object contains a SIP Protocol which is
      used by the EUE to communicate with the P-CSCF."
 ::= { pktcEUEDevPCSCFEntry 5 }

pktcEUEDevPCSCFUsedInetAddressType OBJECT-TYPE
SYNTAX      InetAddressType
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    " This MIB Object contains the Address Type of the P-CSCF
      IP address used by the EUE in communication with the P-CSCF.
      Only ipv4 and ipv6 address types are valid values
      for this MIB Object."
 ::= { pktcEUEDevPCSCFEntry 6 }

pktcEUEDevPCSCFUsedInetAddress OBJECT-TYPE
SYNTAX      InetAddress
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    " This MIB Object contains the IP Address of the
      P-CSCF used by the EUE. Only IPv4 and IPv6 addresses are
      valid values for this MIB Object."
 ::= { pktcEUEDevPCSCFEntry 7 }

pktcEUEDevPCSCFTimerT1      OBJECT-TYPE
SYNTAX      Unsigned32
UNITS       "milliseconds"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    " This is the SIP Timer T1, an estimate for the round
      trip time in the system (UE to P-CSCF). Please
      refer to the PacketCable IMS Delta Session Initiation
      Protocol (SIP) and Session Description Protocol (SDP),
      Stage 3 Specification 3GPP TS 24.229 for more
      information."
REFERENCE
    "PacketCable IMS Delta Session Initiation Protocol (SIP)
      and Session Description Protocol (SDP), Stage 3
      Specification 3GPP TS 24.229"
DEFVAL      {500}
 ::= { pktcEUEDevPCSCFEntry 8 }

pktcEUEDevPCSCFTimerT2      OBJECT-TYPE

```

```

SYNTAX      Unsigned32
UNITS       "milliseconds"
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    " This is the SIP Timer T2, an estimate for the maximum
      retransmit interval for non-INVITE requests and INVITE
      responses. Please refer to the PacketCable IMS Delta
      Session Initiation Protocol (SIP) and Session Description
      Protocol (SDP), Stage 3 Specification 3GPP TS 24.229
      for more information."
REFERENCE
    "PacketCable IMS Delta Session Initiation Protocol (SIP)
      and Session Description Protocol (SDP), Stage 3
      Specification 3GPP TS 24.229"
DEFVAL {4000}
 ::= { pktcEUEDevPCSCFEntry 9 }

```

pktcEUEDevPCSCFTimerT4 OBJECT-TYPE

```

SYNTAX      Unsigned32
UNITS       "milliseconds"
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    " This is the SIP Timer TD, indicates the wait time
      for response retransmits.
      Please refer to the PacketCable IMS Delta Session
      Initiation Protocol (SIP) and Session Description
      Protocol (SDP), Stage 3 Specification 3GPP TS 24.229
      for more information."
REFERENCE
    "PacketCable IMS Delta Session Initiation Protocol (SIP)
      and Session Description Protocol (SDP), Stage 3
      Specification 3GPP TS 24.229"
DEFVAL {5000}
 ::= { pktcEUEDevPCSCFEntry 10 }

```

pktcEUEDevPCSCFTimerTD OBJECT-TYPE

```

SYNTAX      Unsigned32 (0|32000..4294967295)
UNITS       "milliseconds"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    " This is the SIP Timer TD, an estimate for the maximum
      duration a message will remain in the network.
      Please refer to the PacketCable IMS Delta Session
      Initiation Protocol (SIP) and Session Description
      Protocol (SDP), Stage 3 Specification 3GPP TS 24.229
      for more information.
      If the protocol used for a SIP Session is UDP this value is
      used for SIP Timer D, otherwise is ignored and the SIP session."
REFERENCE
    "PacketCable IMS Delta Session Initiation Protocol (SIP)
      and Session Description Protocol (SDP), Stage 3
      Specification 3GPP TS 24.229"
DEFVAL {32000}
 ::= { pktcEUEDevPCSCFEntry 11 }

```

pktcEUEDevPCSCFRowStatus OBJECT-TYPE

```

SYNTAX      RowStatus
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    " This object defines the row status associated with the
      particular P-CSCF Server entry for the particular domain name.

```

The value of the 'pktcEUEDevPCSCFAddrType' object MUST not be modified while this object is 'active'. The value of 'pktcEUEDevPCSCFAddr' MAY be modified while this object is active if the value is consistent with the type specified by the 'pktcEUEDevPCSCFAddrType' object."

```
 ::= { pktcEUEDevPCSCFEntry 12 }
```

-- BSFs associated with a eUE

pktcEUEDevBSFTable OBJECT-TYPE

```
SYNTAX      SEQUENCE OF PktcEUEDevBSFEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    " This data table represents the eUE's knowledge
      of suitable BSFs to contact."

 ::= { pktcEUEDevProfile 5 }
```

pktcEUEDevBSFEntry OBJECT-TYPE

```
SYNTAX      PktcEUEDevBSFEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    " Each entry in this data table contains an instance
      of a BSF, specific to a AS type, for a given Operator's
      Domain Name.
      The entries represent the eUE's knowledge
      of suitable BSFs to contact, as per the IMS GBA
      architecture to obtain credentials and enabling secure
      sessions to Application Servers. A list of
      BSFs for each Operator and application
      types MAY be configured by the Operator."

INDEX { pktcEUEDevOpIndex, pktcEUEDevBSFASType, pktcEUEDevBSFIndex }
 ::= { pktcEUEDevBSFTable 1 }
```

PktcEUEDevBSFEntry ::=

```
SEQUENCE {
    pktcEUEDevBSFASType      SnmpAdminString,
    pktcEUEDevBSFIndex       Unsigned32,
    pktcEUEDevBSFAddrType    InetAddressType,
    pktcEUEDevBSFAddr        InetAddress,
    pktcEUEDevBSFRowStatus   RowStatus
}
```

pktcEUEDevBSFASType OBJECT-TYPE

```
SYNTAX      SnmpAdminString
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    " A unique value used to indicate the AS type to
      which the BSFs correspond.
      Applications using GBA are required to specify
      such identifiers explicitly."

 ::= { pktcEUEDevBSFEntry 1 }
```

pktcEUEDevBSFIndex OBJECT-TYPE

```
SYNTAX      Unsigned32 (1..16)
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    " A unique value used to identify an instance in this
      data table. The indices SHOULD be contiguous.
      When multiple entries are specified, the eUE MUST give
```

```

        precedence to the values indexed by lower indices."

    ::= { pktcEUEDevBSFEntry 2 }

pktcEUEDevBSFAddrType OBJECT-TYPE
    SYNTAX      InetAddressType
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        " This data element contains the type of the data
          element contained in 'pktcEUEDevBSFAddr'."

    DEFVAL      { unknown }
    ::= { pktcEUEDevBSFEntry 3 }

pktcEUEDevBSFAddr OBJECT-TYPE
    SYNTAX      InetAddress
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        " The address of a BSF server associated with
          the domain name indicated by the indices
          'pktcEUEDevOpIndex' (Operator Domain),
          'pktcEUEDevBSFASType' and 'pktcEUEDevBSFIndex'."

    DEFVAL      { "" }
    ::= { pktcEUEDevBSFEntry 4 }

pktcEUEDevBSFRowStatus OBJECT-TYPE
    SYNTAX      RowStatus
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " This object defines the row status associated with this
          instance of a BSF.

          The value of the 'pktcEUEDevBSFAddrType' object MUST not be
          modified while this object is 'active'. The value of
          'pktcEUEDevBSFAddr' MAY be modified while this object is active
          if the value is consistent with the type specified by the
          'pktcEUEDevBSFAddrType' object."
    ::= { pktcEUEDevBSFEntry 5 }

-- -----
-- Certificate Bootstrapping Data
-- -----

pktcEUECBSupport OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This MIB Object is used by the eUE to report
          support for Certificate Bootstrapping.
          If the MIB Object is set to a value of true(1)
          it indicates that the device supports Certificate
          Bootstrapping.
          If the MIB Object is set to a value of false(1)
          it indicates that the device does not support
          Certificate Bootstrapping."
    ::= { pktcEUEDevProfile 6 }

pktcEUECBEnable OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "This MIB Object is used to initiate the Certificate

```

Bootstrapping procedure in an eUE.

If this value is set to a value of true(1) and the MIB Object pktcEUECBData contains a non-zero HTTP/HTTPS URI, then the eUE MUST initiate the Certificate Bootstrapping procedure, if supported.

If the eUE does not support the Certificate Bootstrapping procedure, it rejects any attempt to set this MIB Object to a value of true(1). The eUE MUST return a value of false(2) when this MIB Object is read.

If the Certificate Bootstrapping procedure was successful, the eUE MUST act on the Certificate Bootstrapping configuration file provided.

If the procedure was unsuccessful (e.g., authentication error or unresponsive server), the eUE MUST report the corresponding management event."

```
DEFVAL {false}
 ::= { pktcEUEDevProfile 7 }
```

```
pktcEUECBData OBJECT-TYPE
    SYNTAX      OCTET STRING(SIZE(0..1023))
    MAX-ACCESS   read-write
    STATUS       current
    DESCRIPTION
        "This MIB Object contains a HTTP/HTTPS URI to be used for
        Certificate Bootstrapping. Any attempt to set it to
        anything other than a HTTP/HTTPS URI MUST be rejected
        by the eUE."
    ::= { pktcEUEDevProfile 8 }
```

```
-- -----
-- Scalar MIB Objects for the EUE Device
-- -----
```

```
pktcEUEDevSipPort OBJECT-TYPE
    SYNTAX      InetPortNumber
    MAX-ACCESS   read-write
    STATUS       current
    DESCRIPTION
        "This MIB Object contains the SIP Port to receive the
        SIP Requests on."
    DEFVAL { 5060 }
    ::= { pktcEUEDevProfile 9 }
```

```
-- -----
-- Conformance Information
-- -----
```

```
-- -----
-- Compliance Statements
-- -----
```

```
pktcEUEDevMIBCompliance MODULE-COMPLIANCE
    STATUS       current
    DESCRIPTION
        "The compliance statement for implementations of the eUE MIB "
    MODULE
        MANDATORY-GROUPS {
            pktcEUEDevProfileGroup,
            pktcEUEDevOpGroup,
            pktcEUEDevDnsGroup,
            pktcEUEDevPCSCFGroup,
```

```

        pktcEUEDevBSFGroup,
        pktcEUEDevPerDeviceGroup
    }

    ::= { pktcEUEDevCompliances 1 }

pktcEUEDevProfileGroup OBJECT-GROUP
    OBJECTS {
        pktcEUEDevProfileVersion
    }
    STATUS current
    DESCRIPTION
        "The eUE Device Profile Group."
    ::= { pktcEUEDevGroups 1}

pktcEUEDevOpGroup OBJECT-GROUP
    OBJECTS {
        pktcEUEDevOpDomain,
        pktcEUEDevOpSTUNAddrType,
        pktcEUEDevOpSTUNAddr,
        pktcEUEDevOpSTUNAddrPort,
        pktcEUEDevOpSTUNRelayAddrType,
        pktcEUEDevOpSTUNRelayAddr,
        pktcEUEDevOpSTUNRelayAddrPort,
        pktcEUEDevOpSTUNRelayCredsType,
        pktcEUEDevOpSTUNRelayCreds,
        pktcEUEDevOpRowStatus
    }
    STATUS current
    DESCRIPTION
        "The eUE Operator Group."
    ::= { pktcEUEDevGroups 2}

pktcEUEDevDnsGroup OBJECT-GROUP
    OBJECTS {
        pktcEUEDevDnsAddrType,
        pktcEUEDevDnsAddr,
        pktcEUEDevDnsRowStatus
    }
    STATUS current
    DESCRIPTION
        "The eUE DNS Group."
    ::= { pktcEUEDevGroups 3}

pktcEUEDevPCSCFGroup OBJECT-GROUP
    OBJECTS {
        pktcEUEDevPCSCFAddrType,
        pktcEUEDevPCSCFAddr,
        pktcEUEDevPCSCFSipPort,
        pktcEUEDevPCSCFUsedProtocol,
        pktcEUEDevPCSCFUsedInetAddressType,
        pktcEUEDevPCSCFUsedInetAddress,
        pktcEUEDevPCSCFTimerT1,
        pktcEUEDevPCSCFTimerT2,
        pktcEUEDevPCSCFTimerT4,
        pktcEUEDevPCSCFTimerTD,
        pktcEUEDevPCSCFRowStatus
    }
    STATUS current
    DESCRIPTION
        "The eUE P-CSCF Group."
    ::= { pktcEUEDevGroups 4}

pktcEUEDevBSFGroup OBJECT-GROUP
    OBJECTS {
        pktcEUEDevBSFAddrType,
        pktcEUEDevBSFAddr,

```

```

        pktcEUEDevBSFRowStatus
    }
    STATUS current
    DESCRIPTION
        "The eUE BSF Group."
    ::= { pktcEUEDevGroups 5}

pktcEUEDevPerDeviceGroup OBJECT-GROUP
    OBJECTS {
        pktcEUECBSupport,
        pktcEUECBEnable,
        pktcEUECBData,
        pktcEUEDevSipPort
    }
    STATUS current
    DESCRIPTION
        "The eUE per Device list of objects Group."
    ::= { pktcEUEDevGroups 6}

END

```

B.2 User Configuration MIB Module

CL-PKTC-EUE-USER-MIB DEFINITIONS ::= BEGIN

IMPORTS

```

    PktcEUETCIDType,
    PktcEUETCID,
    PktcEUETCCredsType,
    PktcEUETCCreds,
    PktcEUETCUsrElementIndexType,
    PktcEUETCUsrAppIndexType,
    PktcEUETCAppOrgIdentifier,
    PktcEUETCAppIdentifier,
    PktcEUETCAdminStatus,
    PktcEUETCOperStatus,
    PktcEUETCStatusInfo
        FROM CL-PKTC-EUE-TC-MIB
    MODULE-IDENTITY,
    OBJECT-TYPE
        FROM SNMPv2-SMI
    OBJECT-GROUP,
    MODULE-COMPLIANCE
        FROM SNMPv2-CONF
    SnmpAdminString
        FROM SNMP-FRAMEWORK-MIB
    TruthValue,
    RowStatus
        FROM SNMPv2-TC
    pktcEUEMibs
        FROM CLAB-DEF-MIB;

```

pktcEUEUserMIB MODULE-IDENTITY

```

    LAST-UPDATED "200807100000Z" -- July 10, 2008
    ORGANIZATION "Cable Television Laboratories, Inc."
    CONTACT-INFO
        "Broadband Network Services
        Cable Television Laboratories, Inc.
        858 Coal Creek Circle,
        Louisville, CO 80027, USA
        Phone: +1 303-661-3307
        Email: mibs@cablelabs.com

```


Acknowledgements:

Thomas Clack, Broadcom - Primary author,
 Eugene Nechamkin, Broadcom
 Sumanth Channabasappa, CableLabs
 John Berg, CableLabs
 Eduardo Cardona, CableLabs
 and members of the PacketCable 2.0 Provisioning Focus Team."

DESCRIPTION

"This MIB module contains configuration MIB
 objects for the PacketCable Users as
 required by the PacketCable
 E-UE Provisioning Framework."

REVISION "200807100000Z" -- July 10, 2008

DESCRIPTION

"Revised Version includes ECN EUE-DATA-N-08.0524-5
 and published as I02"

REVISION "200711060000Z" -- Nov 6, 2007

DESCRIPTION

"Initial version, published as part of the CableLabs
 E-UE Provisioning Data Model Specification
 PKT-SP-EUE-DATA-I01-071106
 Copyright 1999-2007 Cable Television Laboratories, Inc.
 All rights reserved."

::= { pktcEUEMibs 4 }

-- Administrative assignments

pktcEUEUsrNotification OBJECT IDENTIFIER ::= { pktcEUEUserMIB 0 }
 pktcEUEUsrObjects OBJECT IDENTIFIER ::= { pktcEUEUserMIB 1 }
 pktcEUEUsrConformance OBJECT IDENTIFIER ::= { pktcEUEUserMIB 2 }

pktcEUEUsrCompliances OBJECT IDENTIFIER ::= { pktcEUEUsrConformance 1 }
 pktcEUEUsrGroups OBJECT IDENTIFIER ::= { pktcEUEUsrConformance 2 }

-- User Profile Information

pktcEUEUsrProfile OBJECT IDENTIFIER ::= { pktcEUEUsrObjects 1 }

pktcEUEUsrProfileVersion OBJECT-TYPE

SYNTAX SnmpAdminString(SIZE(0..6))

MAX-ACCESS read-only

STATUS current

DESCRIPTION

" This MIB Object represents the User Profile Version for this
 MIB module. The eUE MUST set this MIB Object to value of '1.0'."

::= { pktcEUEUsrProfile 1 }

-- User table

pktcEUEUsrIMPTable OBJECT-TYPE

SYNTAX SEQUENCE OF PktcEUEUsrIMPEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

" This data table represents Users associated with
 the eUE. Specifically it provides information related
 to the IM Public Identity (IMPU) of the User."

::= { pktcEUEUsrProfile 2 }

pktcEUEUsrIMPEntry OBJECT-TYPE

SYNTAX PktcEUEUsrIMPUEEntry
 MAX-ACCESS not-accessible
 STATUS current
 DESCRIPTION

" Each entry in this data table describes an association of a user IMPU with the eUE, indexed by a IMPU Identifier.

The eUE uses the entries in this table to register the user in a PacketCable Network.

The credentials for registration are obtained using the association with an IMPI in the MIB table
 pktcEUEUsrIMPITable, referenced via the MIB Object
 pktcEUEUsrIMPIIndexRef.

If two or more active entries have the same IMPU ID, the eUE uses the entry with the lowest Index.

The eUE MAY store pre-configured associations in NVRAM."

INDEX { pktcEUEUsrIMPUIndex }
 ::= { pktcEUEUsrIMPUPTable 1 }

PktcEUEUsrIMPUEEntry ::=

SEQUENCE {	
pktcEUEUsrIMPUIndex	PktcEUETCUsrElementIndexType,
pktcEUEUsrIMPUIIdType	PktcEUETCIDType,
pktcEUEUsrIMPUIId	PktcEUETCID,
pktcEUEUsrIMPUIMPIIndexRef	PktcEUETCUsrElementIndexType,
pktcEUEUsrIMPUDispInfo	SnmpAdminString,
pktcEUEUsrIMPUPOpIndexRefs	SnmpAdminString,
pktcEUEUsrIMPUPAdminStat	PktcEUETCAdminStatus,
pktcEUEUsrIMPUPAdminStatInfo	PktcEUETCStatusInfo,
pktcEUEUsrIMPUPOperStat	PktcEUETCOperStatus,
pktcEUEUsrIMPUPOperStatInfo	PktcEUETCStatusInfo,
pktcEUEUsrIMPUSigSecurity	TruthValue,
pktcEUEUsrIMPUPAdditionalInfo	SnmpAdminString,
pktcEUEUsrIMPUPRowStatus	RowStatus
}	

pktcEUEUsrIMPUIndex OBJECT-TYPE

SYNTAX PktcEUETCUsrElementIndexType
 MAX-ACCESS not-accessible
 STATUS current
 DESCRIPTION

" This MIB Object provides a user IMPU index.
 When the user IMPU is referenced elsewhere, such as
 to associate the device and a user IMPU, this
 MIB Object MUST be used as an index reference.
 A value of '0' MUST NOT be used."

::= { pktcEUEUsrIMPUEEntry 1 }

pktcEUEUsrIMPUIIdType OBJECT-TYPE

SYNTAX PktcEUETCIDType
 MAX-ACCESS read-create
 STATUS current
 DESCRIPTION

" This MIB Object MUST indicate the 'Identifier
 type' of the data value contained in 'pktcEUEUsrIMPUIId'.

Valid types include other(1), publicIdentity(2) and
 username(6)."

DEFVAL { other }

::= { pktcEUEUsrIMPUEEntry 2 }

pktcEUEUsrIMPUIId OBJECT-TYPE

SYNTAX PktcEUETCID

```

MAX-ACCESS    read-create
STATUS        current
DESCRIPTION
    " This MIB Object MUST identify the User IMPU being
      associated with the eUE.

      The type of Identifier is indicated by the
      MIB Object 'pktcEUEUsrIMPUIIdType'."
DEFVAL        { "" }
 ::= { pktcEUEUsrIMPUEEntry 3 }

pktcEUEUsrIMPUIIndexRef OBJECT-TYPE
SYNTAX        PktcEUEUsrElementIndexType
MAX-ACCESS    read-create
STATUS        current
DESCRIPTION
    " This MIB Object MUST provide an index reference
      to a IMPI associated with the corresponding IMPU
      specified in this table entry.

      The index reference points to an entry in the MIB
      table 'pktcEUEUsrIMPITable'.

      If this contains a value of '0', it indicates that
      the user IMPU is not yet associated with an IMPI
      and cannot be used in networks requiring
      authentication. "
DEFVAL        {0}
 ::= { pktcEUEUsrIMPUEEntry 4 }

pktcEUEUsrIMPUDispInfo OBJECT-TYPE
SYNTAX        SnmpAdminString
MAX-ACCESS    read-create
STATUS        current
DESCRIPTION
    " This optional MIB Object MAY contain human readable
      text describing User characteristics. Examples include
      User Display Name, Subscriber Identifier etc."
DEFVAL        { "" }
 ::= { pktcEUEUsrIMPUEEntry 5 }

pktcEUEUsrIMPUIOpIndexRefs OBJECT-TYPE
SYNTAX        SnmpAdminString
MAX-ACCESS    read-create
STATUS        current
DESCRIPTION
    " This optional MIB Object MAY contain a list of comma
      separated Operator domain entries where the user specified
      in this entry 'pktcEUEUsrIMPUIId' can be used.

      The entries MUST be index references to the operator
      table associated with the eUE.

      The eUE MAY attempt to use the user entry in a
      domain or sub-domain specified by the operator table,
      corresponding to the entries listed here.

      The eUE MUST NOT attempt to use the user entry in a
      domain that is not specified by this entry.

      If unspecified, the eUE MUST use the domain identified
      by the IMPU."
DEFVAL        { "" }
 ::= { pktcEUEUsrIMPUEEntry 6 }

```

pktcEUEUsrIMPUPAdminStat OBJECT-TYPE

SYNTAX PktcEUETCAdminStatus

MAX-ACCESS read-create

STATUS current

DESCRIPTION

" This MIB Object contains the administratively desired activation status of the user IMPU.

The eUE MUST allow access to the User identified in 'pktcEUEUsrIMPUPId' if the value is set to 'active', unless determined otherwise and reported in pktcEUEUsrIMPUPOperStat.

The eUE SHOULD attempt to register a User identified in 'pktcEUEUsrIMPUPId' if the value is set to 'active'. PacketCable Applications can specify additional requirements for registration.

If this object is set to 'inactive', all applicable sessions (e.g. SIP registration) are gracefully terminated.

The eUE MUST disallow access to the User identified in 'pktcEUEUsrIMPUPId' if the value is set to 'inactive'"

DEFVAL { active }

::= { pktcEUEUsrIMPUPEntry 7 }

pktcEUEUsrIMPUPAdminStatInfo OBJECT-TYPE

SYNTAX PktcEUETCStatusInfo

MAX-ACCESS read-create

STATUS current

DESCRIPTION

" This MIB Object MAY contain information that describes the activation status indicated in 'pktcEUEIMPUPAdminStat'. Indicates Administratively added information associated with administrative status of the User IMPU. For example 'User temporarily deactivated for maintenance'."

DEFVAL { "" }

::= { pktcEUEUsrIMPUPEntry 8 }

pktcEUEUsrIMPUPOperStat OBJECT-TYPE

SYNTAX PktcEUETCOperStatus

MAX-ACCESS read-only

STATUS current

DESCRIPTION

" This MIB Object contains the operational activation status of the user IMPU.

This object returns the following values:

'active'

When pktcEUEUsrIMPUPAdminStat is 'active' and there are no run-time conditions and/or configuration errors that prohibit the users from communicating with the operator.

'inactive'

When pktcEUEUsrIMPUPAdminStat is 'inactive'

or

When pktcEUEUsrIMPUPAdminStat is 'active' and there are run-time conditions that prohibit the users from communicating with the operator.

'notPresent'

This value is not applicable.

'unknown'

Other conditions not covered by the previous values.

An example of run-time condition that can result in a value of 'inactive' is unsuccessful registration.

PacketCable applications can specify additional conditions for how an IMPU is considered 'active', 'inactive' or 'notPresent', and corresponding state machine."

```
::= { pktcEUEUsrIMPUEntry 9 }
```

pktcEUEUsrIMPUOperStatInfo OBJECT-TYPE

SYNTAX PktcEUETCStatusInfo

MAX-ACCESS read-only

STATUS current

DESCRIPTION

" This MIB Object contains information that describes the activation status indicated in 'pktcEUEUsrIMPUOperStat' or the zero-length string is not detail information is available.

For example 'User deactivated based on user interface input."

DEFVAL { "" }

```
::= { pktcEUEUsrIMPUEntry 10 }
```

pktcEUEUsrIMPUSigSecurity OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

" This element indicates the network requirement for SIP signaling with the P-CSCF.

If set to 'true', the UE MUST attempt secure SIP signaling with the P-CSCF.

If set to 'false', the UE MUST attempt to communicate without a secure SIP communication channel with the P-CSCF.

The P-CSCF is considered to be authoritative and the UE will follow the requirements in PKT 24.229.

After the P-CSCF confirm or set the SIP secure mode the UE MUST report such state."

REFERENCE

"PacketCable IMS Delta Session Initiation Protocol (SIP) and Session Description Protocol (SDP), Stage 3 Specification 3GPP TS 24.229"

DEFVAL {true}

```
::= { pktcEUEUsrIMPUEntry 11 }
```

pktcEUEUsrIMPUAdditionalInfo OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-create

STATUS current

DESCRIPTION

" This MIB Object MAY contain information that describes additional information defined by PacketCable specifications, including those defining PacketCable features.

PacketCable specifications are expected to use this data element to obtain additional information.

To specify such additional info, the following rules apply:

- Each specification planning to use this MIB Object MUST specify data in the following format:
'<Keyword>#<value>', # being the delimiter

e.g. FEATURE_X#ABC
FEATURE_Y#<value of XYZ>

- This MIB Object MUST be a semi-colon separated concatenation of such '<keyword>#<value>' pairs. e.g. FEATURE_X#ABC;FEATURE_Z#DEF
- Since the '#' and ';' characters are used as delimiters, they SHOULD not be specified in the keyword. If specified, any occurrence of these characters in the value field MUST be preceded by the escape character '\\' (e.g. FEATURE_X#A\\#C). Occurrences of '\\' MUST be preceded by itself (e.g. FEATURE_X#A\\C\\#).

The following rules apply on the eUE:

- The eUE MUST first separate all the keyword value pairs, using a '#' that is not preceded by '\\' as the delimiter
- The eUE MUST, For all recognized keywords, decipher the value by interpreting the data after considering the use of '\\' as defined in this definition
- The eUE MUST ignore and report all unrecognized keywords using PacketCable Management"

```
DEFVAL { "" }
::= { pktcEUEUsrIMPUEEntry 12 }
```

pktcEUEUsrIMPURowStatus OBJECT-TYPE

```
SYNTAX      RowStatus
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
```

" This MIB Object defines the row status associated with this particular User in the pktcEUEUsrIMPUPTable.

An entry in this table is not qualified for activation until the object instances of all corresponding columns have been initialized, either by default values or via explicit SET operations. Until all object instances in this row are initialized, the status value for this realm must be 'notReady(3)'.

In particular, two columnar objects must be SET: the 'pktcEUEUsrIMPUIIdType' and the 'pktcEUEUsrIMPUIId'. Once these two objects have been set the row status may be SET to 'active(1)' The eUE MUST not allow these two objects to be changed while the row is 'active'. The value of this object has no effect on whether other columnar objects in this row can be modified."

```
::= { pktcEUEUsrIMPUEEntry 13 }
```

```
-- -----
-- User IMPI Table
-- -----
```

pktcEUEUsrIMPITable OBJECT-TYPE

```
SYNTAX      SEQUENCE OF PktcEUEUsrIMPIEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
```

" This data table contains the user IMPI information associated with users provisioned on the device."

```
::= { pktcEUEUsrProfile 3 }
```

pktcEUEUsrIMPIEntry OBJECT-TYPE

```
SYNTAX      PktcEUEUsrIMPIEntry
```

```

MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "Each entry in this data table contains an instance
    of a user IMPI and associated credentials.

    Each IMPU provisioned in the eUE SHOULD be associated
    with an entry in this table. The exception is in networks
    where certain users are unauthenticated for application
    access."
INDEX { pktcEUEUsrIMPIIndex }
 ::= { pktcEUEUsrIMPITable 1 }

PktcEUEUsrIMPIEntry ::=
    SEQUENCE {
        pktcEUEUsrIMPIIndex          PktcEUETCUsrElementIndexType,
        pktcEUEUsrIMPIIdType         PktcEUETCIDType,
        pktcEUEUsrIMPIId             PktcEUETCID,
        pktcEUEUsrIMPICredsType       PktcEUETCCredsType,
        pktcEUEUsrIMPICredentials     PktcEUETCCreds,
        pktcEUEUsrIMPIRowStatus       RowStatus
    }

pktcEUEUsrIMPIIndex OBJECT-TYPE
    SYNTAX      PktcEUETCUsrElementIndexType
    MAX-ACCESS   not-accessible
    STATUS       current
    DESCRIPTION
        " This MIB Object provides a user IMPI index.
        When the user IMPI is referenced elsewhere, such as
        to associate the IMPU and an IMPI, this
        MIB Object MUST be used as an index reference.
        A value of '0' MUST NOT be used."
    ::= { pktcEUEUsrIMPIEntry 1 }

pktcEUEUsrIMPIIdType OBJECT-TYPE
    SYNTAX      PktcEUETCIDType
    MAX-ACCESS   read-create
    STATUS       current
    DESCRIPTION
        " This MIB Object MUST indicate the 'Identifier
        type' of the data value contained in 'pktcEUEUsrIMPIId'.

        Valid types include other(1), privateKey(2) and
        username(6)."
    DEFVAL      { other }
    ::= { pktcEUEUsrIMPIEntry 2 }

pktcEUEUsrIMPIId OBJECT-TYPE
    SYNTAX      PktcEUETCID
    MAX-ACCESS   read-create
    STATUS       current
    DESCRIPTION
        " This MIB Object MUST identify a User IMPI being
        specified in this table.

        The type of Identifier is indicated by the
        MIB Object 'pktcEUEUsrIMPIIdType'."
    DEFVAL      { "" }
    ::= { pktcEUEUsrIMPIEntry 3 }

pktcEUEUsrIMPICredsType OBJECT-TYPE
    SYNTAX      PktcEUETCCredsType
    MAX-ACCESS   read-create
    STATUS       current
    DESCRIPTION

```

```

        " This MIB Object contains the type of credentials
        contained in the MIB Object 'pktcEUEUsrIMPICredentials'.
        Valid types include other(1), privateIdentity(2) and
        username(6)."
DEFVAL    { none }
 ::= { pktcEUEUsrIMPIEntry 4 }

pktcEUEUsrIMPICredentials OBJECT-TYPE
SYNTAX      PktcEUEUETCCreds
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    " This MIB Object allows the Operator to configure credentials
    associated with an IMPI. This value is used with, and must
    be consistent with, the value
    of the associated 'pktcEUEUsrIMPICredsType' object.

    If read this MIB Object MUST always return an empty
    string value for privacy reasons.

    A Operator SHOULD provide this MIB Object only
    over a secured configuration interface to avoid
    security threats due to compromised credentials. "
DEFVAL      { "" }
 ::= { pktcEUEUsrIMPIEntry 5 }

pktcEUEUsrIMPIRowStatus OBJECT-TYPE
SYNTAX      RowStatus
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    " This MIB Object defines the row status associated with this
    entry.

    The value of the 'pktcEUEUsrIMPICredsType' object MUST NOT be
    modified while this object is 'active'.

    The value of 'pktcEUEUsrIMPICredentials' MAY be modified
    while this object is active if the value is consistent with
    the type specified by the 'pktcEUEUsrIMPICredsType' object. "
 ::= { pktcEUEUsrIMPIEntry 6 }

-- -----
-- User to Apps Mapping Table
-- -----
pktcEUEUsrAppMapTable OBJECT-TYPE
SYNTAX      SEQUENCE OF PktcEUEUsrAppMapEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    " This data table represents Applications associated with
    a User IMPU."
 ::= { pktcEUEUsrProfile 4 }

pktcEUEUsrAppMapEntry OBJECT-TYPE
SYNTAX      PktcEUEUsrAppMapEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    " Each entry in this data table identifies an application
    associated with the user, the application profile index
    reference, administrative status and the operational
    status information"
INDEX       { pktcEUEUsrIMPUIndex, pktcEUEUsrAppMapAppIndex }
 ::= { pktcEUEUsrAppMapTable 1 }

PktcEUEUsrAppMapEntry ::=

```



```

SEQUENCE      {
    pktcEUEUsrAppMapAppIndex          PktcEUETCUsrAppIndexType,
    pktcEUEUsrAppMapAppOrgID          PktcEUETCAppOrgIdentifier,
    pktcEUEUsrAppMapAppIdentifier     PktcEUETCAppIdentifier,
    pktcEUEUsrAppMapAppIndexRef       PktcEUETCUsrAppIndexType,
    pktcEUEUsrAppMapAppAdminStat      PktcEUETCAdminStatus,
    pktcEUEUsrAppMapAppAdminStatInfo  PktcEUETCStatusInfo,
    pktcEUEUsrAppMapAppOperStat       PktcEUETCOperStatus,
    pktcEUEUsrAppMapAppOperStatInfo   PktcEUETCStatusInfo,
    pktcEUEUsrAppMapRowStatus         RowStatus
}

pktcEUEUsrAppMapAppIndex OBJECT-TYPE
    SYNTAX      PktcEUETCUsrAppIndexType
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        " This MIB Object represents an index to map
          an Application instance associated with the User
          IMPU."
    ::= { pktcEUEUsrAppMapEntry 1 }

pktcEUEUsrAppMapAppOrgID OBJECT-TYPE
    SYNTAX      PktcEUETCAppOrgIdentifier
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " This MIB Object identifies the Organization
          specifying the app identifier contained in
          the MIB Object 'pktcEUEUsrAppMapAppIdentifier'."
    ::= { pktcEUEUsrAppMapEntry 2 }

pktcEUEUsrAppMapAppIdentifier OBJECT-TYPE
    SYNTAX      PktcEUETCAppIdentifier
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " This MIB Object represents the identifier
          for a Application associated with the User.
          The application identifier MUST represent
          an application specified by the organization
          specified in 'pktcEUEUsrAppMapAppOrgID'."
    ::= { pktcEUEUsrAppMapEntry 3 }

pktcEUEUsrAppMapAppIndexRef OBJECT-TYPE
    SYNTAX      PktcEUETCUsrAppIndexType
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " This MIB Object represents the index reference
          to an application profile for the application
          identified by the MIB Object
          'pktcEUEUsrAppMapAppIdentifier'.
          If this value is set to a value of '0' then
          the following conditions apply:
          - If the application has no specific configuration
            data, the network activation status MUST be
            considered by the eUE
          - If the application has configuration data elements
            the eUE MUST deactivate the application. The deactivation
            is reported by 'pktcEUEUsrAppMapAppOperStat'."
    DEFVAL {0}
    ::= { pktcEUEUsrAppMapEntry 4 }

```

```

pktcEUEUsrcAppMapAppAdminStat OBJECT-TYPE
    SYNTAX      PktcEUETCAdminStatus
    MAX-ACCESS   read-create
    STATUS       current
    DESCRIPTION
        " This MIB Object contains the administratively desired
          activation status of this instance.

          If 'active' the User can use the application.
          If 'inactive' the user can not use the application
        "
    DEFVAL {active}
    ::= { pktcEUEUsrcAppMapEntry 5 }

pktcEUEUsrcAppMapAppAdminStatInfo OBJECT-TYPE
    SYNTAX      PktcEUETCStatusInfo
    MAX-ACCESS   read-create
    STATUS       current
    DESCRIPTION
        " This MIB Object represents additional
          information for the status information
          represented by 'pktcEUEUsrcAppMapAppAdminStat'."
    ::= { pktcEUEUsrcAppMapEntry 6 }

pktcEUEUsrcAppMapAppOperStat OBJECT-TYPE
    SYNTAX      PktcEUETCOperStatus
    MAX-ACCESS   read-only
    STATUS       current
    DESCRIPTION
        " This MIB Object represents the current operational status
          of the user using the application specified in this entry.

          This object returns the following values:

          'active'
          When pktcEUEUsrcAppMapAppAdminStat is 'active' and there are
          no run-time conditions and/or configuration errors that prohibit
          the IMPU to use this application.

          'inactive'
          When pktcEUEUsrcAppMapAppAdminStat is 'inactive'
          or
          When pktcEUEUsrcAppMapAppAdminStat is 'active' and there
          are run-time conditions and/or configuration errors that
          prohibit the IMPU to use this application.

          'notPresent'
          When the application is not available or unknown to the UE.

          'unknown'
          Other conditions not covered by the previous values.

          An example of a run-time condition that can result in a value
          of 'inactive' is unsuccessful user registration.

          PacketCable applications can specify additional conditions for
          how an application is considered 'active', 'inactive' or
          'notPresent' for an IMPU."
    ::= { pktcEUEUsrcAppMapEntry 7 }

pktcEUEUsrcAppMapAppOperStatInfo OBJECT-TYPE
    SYNTAX      PktcEUETCStatusInfo
    MAX-ACCESS   read-only

```

```

STATUS      current
DESCRIPTION
    " This MIB Object represents additional
      information for the status information
      represented by 'pktcEUEUsrAppMapAppOperStat'.

      For example, the pktcEUEUsrAppMapAppOperStat value
      'notPresent' can report in this object the value
      'UE does not support this application'."
 ::= { pktcEUEUsrAppMapEntry 8 }

pktcEUEUsrAppMapRowStatus OBJECT-TYPE
SYNTAX      RowStatus
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    " This MIB Object defines the row status associated with this
      particular User in the pktcEUEUsrAppMapTable.

      An entry in this table is not qualified for activation
      until the object instances of all corresponding columns
      have been initialized, either by default values or via
      explicit SET operations.  Until all object instances in
      this row are initialized, the status value for this realm
      must be 'notReady(3)'.

      In particular, two columnar objects must be SET: the
      'pktcEUEUsrAppMapAppOrgID' and pktcEUEUsrAppMapAppIdentifier.
      Once these two objects have been set the row status may be SET
      to 'active(1)'.

      The eUE MUST not allow these two objects to be changed while
      the row is 'active'. The value of this object has no effect on
      whether other columnar objects in this row can be modified."

 ::= { pktcEUEUsrAppMapEntry 9 }

-- -----
-- Conformance Information
-- -----

-- -----
-- Compliance Statements
-- -----

pktcEUEUsrMIBCompliance MODULE-COMPLIANCE
STATUS      current
DESCRIPTION
    "The compliance statement for implementations of the User Mib "
MODULE      -- this module
MANDATORY-GROUPS {
    pktcEUEUsrProfileGroup,
    pktcEUEUsrIMPUGroup,
    pktcEUEUsrIMPIGroup,
    pktcEUEUsrAppMapGroup
}
 ::= { pktcEUEUsrCompliances 1 }

pktcEUEUsrProfileGroup OBJECT-GROUP
OBJECTS {
    pktcEUEUsrProfileVersion
}
STATUS      current
DESCRIPTION
    "The eUE Usr Profile Group."
 ::= { pktcEUEUsrGroups 1 }

```

```

pktcEUEUsrIMPUGroup OBJECT-GROUP
  OBJECTS {
    pktcEUEUsrIMPUIIdType,
    pktcEUEUsrIMPUIId,
    pktcEUEUsrIMPUIMPIIndexRef,
    pktcEUEUsrIMPUDispInfo,
    pktcEUEUsrIMPUIOpIndexRefs,
    pktcEUEUsrIMPUIAdminStat,
    pktcEUEUsrIMPUIAdminStatInfo,
    pktcEUEUsrIMPUIOperStat,
    pktcEUEUsrIMPUIOperStatInfo,
    pktcEUEUsrIMPUSigSecurity,
    pktcEUEUsrIMPUIAdditionalInfo,
    pktcEUEUsrIMPUIRowStatus
  }
  STATUS current
  DESCRIPTION
    "The user IMPU Group."
    ::= { pktcEUEUsrGroups 2}

pktcEUEUsrIMPIGroup OBJECT-GROUP
  OBJECTS {
    pktcEUEUsrIMPICredsType,
    pktcEUEUsrIMPICredentials,
    pktcEUEUsrIMPIdType,
    pktcEUEUsrIMPId,
    pktcEUEUsrIMPIdRowStatus
  }
  STATUS current
  DESCRIPTION
    "The user IMPI Group."
    ::= { pktcEUEUsrGroups 3 }

pktcEUEUsrAppMapGroup OBJECT-GROUP
  OBJECTS {
    pktcEUEUsrAppMapAppOrgID,
    pktcEUEUsrAppMapAppIdentifier,
    pktcEUEUsrAppMapAppIndexRef,
    pktcEUEUsrAppMapAppAdminStat,
    pktcEUEUsrAppMapAppAdminStatInfo,
    pktcEUEUsrAppMapAppOperStat,
    pktcEUEUsrAppMapAppOperStatInfo,
    pktcEUEUsrAppMapAppRowStatus
  }
  STATUS current
  DESCRIPTION
    "The User to Applications Mapping Group."
    ::= { pktcEUEUsrGroups 4 }

END

```

Annex C PacketCable eUE Provisioning and Management Modules

C.1 Provisioning and Management MIB Module

CL-PKTC-EUE-PROV-MGMT-MIB DEFINITIONS ::= BEGIN

IMPORTS

```

    OBJECT-TYPE,
    MODULE-IDENTITY,
    Unsigned32
        FROM SNMPV2-SMI

    OBJECT-GROUP,
    MODULE-COMPLIANCE
    SnmpAdminString
        FROM SNMPv2-CONF

    InetAddressType,
    InetAddress
        FROM SNMP-FRAMEWORK-MIB

    InetAddressType,
    InetAddress
        FROM INET-ADDRESS-MIB

    pktcEUEMibs
        FROM CLAB-DEF-MIB;
```

pktcEUEProvMgmtMIB MODULE-IDENTITY

LAST-UPDATED "200807100000Z" -- July 10, 2008

ORGANIZATION "Cable Television Laboratories, Inc."

CONTACT-INFO

```

    "Broadband Network Services
    Postal: Cable Television Laboratories, Inc
    858 Coal Creek Circle
    Louisville, CO 80027
    U.S.A.
    Phone: +1 303 661 9100
    Fax: +1 303 661 9199
    E-mail:mibs@cablelabs.com
```

Acknowledgements:

```

    Thomas Clack, Broadcom - Primary author
    Josh Littlefield, Cisco,
    Eugene Nechamkin, Broadcom
    Sumanth Channabasappa, CableLabs
    Eduardo Cardona, CableLabs
    and members of the PacketCable 2.0 Provisioning Focus Team. "
```

DESCRIPTION

```

    "This MIB module provides the provisioning and management
    MIB module for the E-UE Provisioning Framework."
```

REVISION "200807100000Z" -- July 10, 2008

DESCRIPTION

```

    "Revised Version includes ECN EUE-DATA-N-08.0524-5
    and published as I02"
```

REVISION "200711060000Z" -- Nov 6, 2007

DESCRIPTION

```

    "Initial version, published as part of the CableLabs
    E-UE Provisioning Data Model Specification
    PKT-SP-EUE-DATA-I01-071106
    Copyright 1999-2007 Cable Television Laboratories, Inc.
    All rights reserved."
```

::= { pktcEUEMibs 5 }

-- Administrative assignments

```

pktcEUEProvMgmtNotifications OBJECT IDENTIFIER ::= { pktcEUEProvMgmtMIB 0 }
pktcEUEProvMgmtObjects       OBJECT IDENTIFIER ::= { pktcEUEProvMgmtMIB 1 }
pktcEUEProvMgmtConformance  OBJECT IDENTIFIER ::= { pktcEUEProvMgmtMIB 2 }
```

```

pktcEUEProvMgmtVersion OBJECT-TYPE
    SYNTAX      SnmpAdminString(SIZE(0..6))
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        " This MIB Object represents the Provisioning and Management Module
          version. The eUE MUST set this MIB Object to value of '1.0'."
    ::= { pktcEUEProvMgmtObjects 1 }

-- DHCP Servers for IPv6
pktcEUEdHcpv6ServerId1 OBJECT-TYPE
    SYNTAX      OCTET STRING (SIZE(0..32))
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        " This MIB Object contains the primary DHCP Server identifier
          (DSS_ID)the E-UE was provided with, during provisioning.

          The eUE MUST populate this MIB Object with the first
          thirty-two bytes of the DHCPv6 Server identifier
          provided within the eCM's CL_OPTION_CCCV6 or CL_V4OPTION_CCCV6,
          sub-option 1."
    DEFVAL      { 'H' }
    ::= { pktcEUEProvMgmtObjects 2 }

pktcEUEdHcpv6ServerId2 OBJECT-TYPE
    SYNTAX      OCTET STRING (SIZE(0..32))
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        " This MIB Object contains the secondary DHCP Server identifier
          (DSS_ID) the E-UE was provided with, during provisioning.

          The eUE MUST populate this MIB Object with the first
          thirty-two bytes of the DHCPv6 Server identifier
          provided within the eCM's CL_OPTION_CCCV6 or CL_V4OPTION_CCCV6,
          sub-option 2."
    DEFVAL      { 'H' }
    ::= { pktcEUEProvMgmtObjects 3 }

pktcEUEdHcpv6ServerAddressType OBJECT-TYPE
    SYNTAX      InetAddressType
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This MIB Object contains the DHCP Server Address type
          contained in the MIB Object 'pktcEUEdHcpv6ServerAddress'.
          Valid values are 'ipv6(2)' and 'unknown(0)'."
    ::= { pktcEUEProvMgmtObjects 4 }

pktcEUEdHcpv6ServerAddress OBJECT-TYPE
    SYNTAX      InetAddress
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This MIB Object contains the DHCPv6 Server address from
          which the eUE obtained its IPv6 address, if the eUE
          is in IPv6 mode, and can obtain the information."
    ::= { pktcEUEProvMgmtObjects 5 }

-- DNS Servers for IPv6
pktcEUEdNsv6ServerAddressType OBJECT-TYPE
    SYNTAX      InetAddressType
    MAX-ACCESS  read-only

```

```

STATUS      current
DESCRIPTION
    "This MIB Object contains the DNS Server Address type
    contained in the MIB Object 'pktcEUEdNsv6ServerAddress'.
    Valid values are 'ipv6(2)' and 'unknown(0)'."
 ::= { pktcEUEProvMgmtObjects 6 }

pktcEUEdNsv6ServerAddress1 OBJECT-TYPE
SYNTAX      InetAddress
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
    "This MIB Object contains the primary DNSv6 Server address
    which the eUE obtained via DHCPv6, when the eUE
    is in IPv6 mode."
 ::= { pktcEUEProvMgmtObjects 7 }

pktcEUEdNsv6ServerAddress2 OBJECT-TYPE
SYNTAX      InetAddress
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
    "This MIB Object contains the secondary DNSv6 Server address
    which the eUE obtained via DHCPv6, when the eUE
    is in IPv6 mode."
 ::= { pktcEUEProvMgmtObjects 8 }

-- Object Groups
-- The object groups used in this MIB module are imported from
-- the PKTC-IETF-MTA-MIB MIB (RFC4682).

-- Conformance Statements
pktcEUEProvMgmtCompliances OBJECT IDENTIFIER ::= { pktcEUEProvMgmtConformance 1 }
pktcEUEProvMgmtGroups      OBJECT IDENTIFIER ::= { pktcEUEProvMgmtConformance 2 }

-- Compliance Statements
pktcEUEProvMgmtCompliance MODULE-COMPLIANCE
STATUS      current
DESCRIPTION
    "The compliance statement for PacketCable eUE devices
    that implement the PacketCable eUE Provisioning Framework.

    This compliance statement specifies, for the PacketCable
    eUE Provisioning framework, the required objects from the 'Multimedia
    Terminal Adapter(MTA)Management Information Base for
    PacketCable and IPCablecom-Compliant Devices'(RFC 4682)MIB.

    Some objects from RFC4682 have been enhanced for applicability
    to eUEs. Similarly, inapplicable objects are clearly indicated.

    As indicated in the eUE Provisioning specification, references
    to E-MTA and eMTA in RFC4682 are to be understood to be applicable
    to E-UE and eUE, respectively. "
REFERENCE
    "PacketCable E-UE Provisioning Framework Specification"

MODULE      PKTC-IETF-MTA-MIB
MANDATORY-GROUPS {
    pktcMtaGroup,
    pktcMtaNotificationGroup
}

-- The following pktcEUEDevBase group describes the base eUE objects

OBJECT      pktcMtaDevResetNow
DESCRIPTION

```

" This MIB Object controls the eUE software reset.
 The eUE MUST return a value of 'false' upon an Object read.
 The eUE MUST reset itself when this object is set to a value of 'true', and perform the following actions:

- All Services (if present) are immediately terminated.
- Any sessions (even on the behalf of Users) are gracefully terminated.
- The provisioning flow is started at step eUE-1.

If a value is written into an instance of 'pktcMtaDevResetNow', the agent MUST NOT retain the supplied value across eUE re-initializations or reboots. "

```
-- OBJECT   pktcMtaDevSerialNumber      - Same as PKTC-IETF-MTA-MIB
-- OBJECT   pktcMtaDevSwCurrentVers     - Same as PKTC-IETF-MTA-MIB
-- OBJECT   pktcMtaDevFQDN               - Same as PKTC-IETF-MTA-MIB
```

```
OBJECT   pktcMtaDevEndPntCount
MIN-ACCESS   not-accessible
DESCRIPTION
  " Object not applicable for the eUE."
```

```
OBJECT   pktcMtaDevEnabled
DESCRIPTION
  " This MIB Object contains the eUE Admin Status of this device.
  If this object is set to 'true', the eUE is
  administratively enabled, and the eUE MUST be able to
  interact with the PacketCable entities, such as the
  Provisioning Server, KDC, and other eUEs on all
  PacketCable interfaces.
```

If this object is set to 'false', the eUE is administratively disabled and MUST do the following:

- All Services (if present) are immediately terminated.
- Any sessions (even on the behalf of Users) are gracefully terminated.

Additionally, the eUE MUST maintain the SNMP Interface for management and also the SNMP Key management interface. Also, the eUE MUST NOT continue Kerberized key management with any devices, except with the Provisioning server, until this object is set to 'true'.

If a value is written into an instance of pktcMtaDevEnabled, the agent MUST NOT retain the supplied value across eUE re-initializations or reboots."

```
-- OBJECT   pktcMtaDevTypeIdentifier    - Same as PKTC-IETF-MTA-MIB
-- OBJECT   pktcMtaDevProvisioningState - Same as PKTC-IETF-MTA-MIB
-- OBJECT   pktcMtaDevHttpAccess        - Same as PKTC-IETF-MTA-MIB
-- OBJECT   pktcMtaDevProvisioningTimer  - Same as PKTC-IETF-MTA-MIB
-- OBJECT   pktcMtaDevProvisioningCounter - Same as PKTC-IETF-MTA-MIB
-- OBJECT   pktcMtaDevErrorOidIndex     - Same as PKTC-IETF-MTA-MIB
-- OBJECT   pktcMtaDevErrorOid          - Same as PKTC-IETF-MTA-MIB
-- OBJECT   pktcMtaDevErrorValue        - Same as PKTC-IETF-MTA-MIB
-- OBJECT   pktcMtaDevErrorReason       - Same as PKTC-IETF-MTA-MIB
```

-- The following object group describes server access and parameters used

```
OBJECT   pktcMtaDevDhcpServerAddressType
DESCRIPTION
  " This MIB Object is only required to support the DHCPv4 address type. "
```

```
-- NOTE: pktcMtaDevServerDhcp1 and pktcMtaDevServerDhcp2 are intended for
--       IPv4 DHCP Servers per RFC 4682. IPv6 DHCP information is contained
--       in the prov-mgmt extension MIB module.
-- OBJECT   pktcMtaDevServerDhcp1        - Same as PKTC-IETF-MTA-MIB
```



```

-- OBJECT pktcMtaDevServerDhcp2 - Same as PKTC-IETF-MTA-MIB

OBJECT pktcMtaDevDnsServerAddressType
DESCRIPTION
    " This MIB Object is only required to support the DHCPv4 address type. "

-- NOTE: pktcMtaDevServerDns1 and pktcMtaDevServerDns2 are intended for
--        IPv4 DNS Servers per RFC 4682. IPv6 DNS information is contained
--        in the prov-mgmt extension MIB module.

-- OBJECT pktcMtaDevServerDns1 - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevServerDns2 - Same as PKTC-IETF-MTA-MIB

OBJECT pktcMtaDevTimeServerAddressType
MIN-ACCESS not-accessible
DESCRIPTION
    " This MIB Object is not applicable for the eUE."

OBJECT pktcMtaDevTimeServer
MIN-ACCESS not-accessible
DESCRIPTION
    " This MIB Object not applicable for the eUE."

-- OBJECT pktcMtaDevConfigFile - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevSnmpEntity - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevProvConfigHash - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevProvConfigKey - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevProvConfigEncryptAlg - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevProvSolicitedKeyTimeout - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevProvUnsolicitedKeyMaxTimeout - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevProvUnsolicitedKeyNomTimeout - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevProvUnsolicitedKeyMaxRetries - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevProvKerbRealmName - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevProvState - Same as PKTC-IETF-MTA-MIB

-- The following object group describes the security objects.

-- OBJECT pktcMtaDevManufacturerCertificate - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevCertificate - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevCorrelationId - Same as PKTC-IETF-MTA-MIB
-- OBJECT pktcMtaDevTelephonyRootCertificate - Same as PKTC-IETF-MTA-MIB

OBJECT pktcMtaDevRealmAvailSlot
SYNTAX Unsigned32 (0)
MIN-ACCESS read-only
DESCRIPTION
    " eUE will report 0 available rows since eUE will
    have one row entry for pktcMtaDevRealmTable."

OBJECT pktcMtaDevRealmName
MIN-ACCESS read-only
DESCRIPTION
    " eUE will only have one row entry for this object."

OBJECT pktcMtaDevRealmPkinitGracePeriod
MIN-ACCESS read-only
DESCRIPTION
    " eUE will only have one read-only row entry for this object."

OBJECT pktcMtaDevRealmTgsGracePeriod
MIN-ACCESS read-only
DESCRIPTION
    " eUE will only have one read-only row entry for this object."

OBJECT pktcMtaDevRealmOrgName

```

MIN-ACCESS read-only
DESCRIPTION
" eUE will only have one read-only row entry for this object."

OBJECT pktcMtaDevRealmUnsolicitedKeyMaxTimeout
MIN-ACCESS read-only
DESCRIPTION
" eUE will only have one read-only row entry for this object."

OBJECT pktcMtaDevRealmUnsolicitedKeyNomTimeout
MIN-ACCESS read-only
DESCRIPTION
" eUE will only have one read-only row entry for this object."

OBJECT pktcMtaDevRealmUnsolicitedKeyMaxRetries
MIN-ACCESS read-only
DESCRIPTION
" eUE will only have one read-only row entry for this object."

OBJECT pktcMtaDevRealmStatus
MIN-ACCESS not-accessible
DESCRIPTION
" eUE will only have one row entry for this object.

This table only has one row."

OBJECT pktcMtaDevCmsAvailSlot
MIN-ACCESS not-accessible
DESCRIPTION
" Object not applicable for the eUE."

OBJECT pktcMtaDevCmsFqdn
MIN-ACCESS not-accessible
DESCRIPTION
" Object not applicable for the eUE."

OBJECT pktcMtaDevCmsKerbRealmName
MIN-ACCESS not-accessible
DESCRIPTION
" Object not applicable for the eUE."

OBJECT pktcMtaDevCmsMaxClockSkew
MIN-ACCESS not-accessible
DESCRIPTION
" Object not applicable for the eUE."

OBJECT pktcMtaDevCmsSolicitedKeyTimeout
MIN-ACCESS not-accessible
DESCRIPTION
" Object not applicable for the eUE."

OBJECT pktcMtaDevCmsUnsolicitedKeyMaxTimeout
MIN-ACCESS not-accessible
DESCRIPTION
" Object not applicable for the eUE."

OBJECT pktcMtaDevCmsUnsolicitedKeyNomTimeout
MIN-ACCESS not-accessible
DESCRIPTION
" Object not applicable for the eUE."

OBJECT pktcMtaDevCmsUnsolicitedKeyMaxRetries
MIN-ACCESS not-accessible
DESCRIPTION
" Object not applicable for the eUE."

OBJECT pktcMtaDevCmsIpsecCtrl

```

MIN-ACCESS    not-accessible
DESCRIPTION
    " Object not applicable for the eUE."

OBJECT pktcMtaDevCmsStatus
MIN-ACCESS    not-accessible
DESCRIPTION
    " Object not applicable for the eUE."

OBJECT pktcMtaDevResetKrbTickets
SYNTAX BITS {
    invalidateProvOnReboot    (0)
}
DESCRIPTION
    " the eUE only support the
      invalidateProvOnReboot bit (bit 0) for this object. The
      invalidateAllCmsOnReboot bit (bit 1) is not supported."

MODULE
    MANDATORY-GROUPS {
        pktcEUEProvMgmtGroup
    }
    ::= { pktcEUEProvMgmtCompliances 1 }

pktcEUEProvMgmtGroup OBJECT-GROUP
    OBJECTS {
        pktcEUEProvMgmtVersion,
        pktcEUEdHcpv6ServerId1,
        pktcEUEdHcpv6ServerId2,
        pktcEUEdHcpv6ServerAddressType,
        pktcEUEdHcpv6ServerAddress,
        pktcEUEdNsv6ServerAddressType,
        pktcEUEdNsv6ServerAddress1,
        pktcEUEdNsv6ServerAddress2
    }
    STATUS current
    DESCRIPTION
        "The eUE Operator Group."
    ::= { pktcEUEProvMgmtGroups 1}

-- Notifications
-- pktcMtaDevProvisioningEnrollment NOTIFICATION-TYPE - Same as PKTC-IETF-MTA-
MIB
-- pktcMtaDevProvisioningStatus NOTIFICATION-TYPE - Same as PKTC-IETF-MTA-
MIB

END

```

C.2 Management Event MIB Module

CL-PKTC-EUE-EVENT-MIB DEFINITIONS ::= BEGIN

IMPORTS

```

OBJECT-TYPE,
MODULE-IDENTITY      FROM SNMPv2-SMI
OBJECT-GROUP,
MODULE-COMPLIANCE    FROM SNMPv2-CONF
SnmpAdminString
pktcEUEMibs           FROM SNMP-FRAMEWORK-MIB
pktcEUEMibs           FROM CLAB-DEF-MIB;

```

pktcEUEEventMIB MODULE-IDENTITY

LAST-UPDATED "200711060000Z"
 ORGANIZATION "Cable Television Laboratories, Inc."
 CONTACT-INFO
 "Sumanth Channabasappa
 Postal: Cable Television Laboratories, Inc
 858 Coal Creek Circle
 Louisville, CO 80027
 U.S.A.
 Phone: +1 303 661 9100
 Fax: +1 303 661 9199
 E-mail:mibs@cablelabs.com

 Acknowledgements:
 Thomas Clack, Broadcom - Primary author,
 and members of the PacketCable PACM Focus Team."

DESCRIPTION
 "This MIB module provides the management objects for the
 Management Event mechanism as specified by the PacketCable
 E-UE Provisioning Framework."
 ::= { pktcEUEMibs 6 }

-- Administrative assignments
 pktcEUEEventNotifications OBJECT IDENTIFIER ::= { pktcEUEEventMIB 0 }
 pktcEUEEventObjects OBJECT IDENTIFIER ::= { pktcEUEEventMIB 1 }
 pktcEUEEventConformance OBJECT IDENTIFIER ::= { pktcEUEEventMIB 2 }

pktcEUEMEMVersion OBJECT-TYPE
 SYNTAX SnmpAdminString(SIZE(0..6))
 MAX-ACCESS read-only
 STATUS current
 DESCRIPTION
 " This MIB Object represents the Management Event Reporting Module
 version. The eUE MUST set this MIB Object to value of '1.0'. "
 ::= { pktcEUEEventObjects 1 }

-- Object Groups
 -- The object groups used in this MIB module are imported from
 -- the PKTC-EVENT-MIB (PKT-SP-EVEMIB1.5).

-- Conformance Statements
 pktcEUEEventCompliances OBJECT IDENTIFIER ::= { pktcEUEEventConformance 1 }
 pktcEUEEventGroups OBJECT IDENTIFIER ::= { pktcEUEEventConformance 2 }

-- Compliance Statements
 pktcEUEEventCompliance MODULE-COMPLIANCE
 STATUS current
 DESCRIPTION
 "The compliance statement for CableLabs compliant eUE devices
 that implement the PacketCable E-UE Provisioning Framework.

 This compliance statement specifies, for PacketCable
 E-UE Provisioning, the required objects from the PKTC-EVENT-MIB
 defined in the PacketCable 1.5 Specifications Management Event
 MIB Specification, PKT-SP-EVEMIB1.5-I02-050812.

 Some objects from RFC4682 have been enhanced for applicability
 to eUEs. Similarly, inapplicable objects are clearly indicated."

REFERENCE
 "PacketCable Embedded UE Provisioning Framework Specification"

MODULE PKTC-EVENT-MIB
 MANDATORY-GROUPS {
 pktcEventGroup,
 pktcEventNotificationGroup
 }

```
-- Event Reporting control objects

-- OBJECT pktcDevEvControl - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEvSyslogAddressType - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEvSyslogAddress - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEvSyslogUdpPort - Same as PKTC-EVENT-MIB

-- Event throttling control

-- OBJECT pktcDevEvThrottleAdminStatus
-- OBJECT pktcDevEvThrottleThreshold - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEvThrottleInterval - Same as PKTC-EVENT-MIB

-- Status Reporting

-- OBJECT pktcDevEvTransmissionStatus - Same as PKTC-EVENT-MIB

-- Event Descriptions

-- OBJECT pktcDevEventDescrId - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEventDescrEnterprise - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEventDescrFacility - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEventDescrLevel - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEventDescrReporting - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEventDescrText - Same as PKTC-EVENT-MIB

-- Events generated

-- OBJECT pktcDevEvLogIndex - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEvLogTime - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEvLogEnterprise - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEvLogId - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEvLogText - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEvLogEndpointName - Same as PKTC-EVENT-MIB
-- OBJECT pktcDevEvLogType - Same as PKTC-EVENT-MIB

OBJECT pktcDevEvLogTargetInfo
DESCRIPTION
    "This MIB Object contains a comma separated list of the
    actions taken for external notifications, along with the
    target IP address for the generated events. Locally
    stored events must not be recorded in this MIB Object.

    The syntax is as:
    <action-1/IP>,<action-2/IP>,<action-3/IP>

    Where <action-n/IP> is to be denoted as follows:
    For syslog events:
        syslog/<IP address of the syslog Server>
    For SNMP traps:
        snmpTrap/<IP address of the SNMP Server>
    For SNMP INFORMS:
        snmpInform/<IP address of the SNMP Server>

    If there are multiple targets for the same type (SNMP
    Traps sent to multiple IP addresses) or if there are
    multiple messages sent to the same IP (syslog and SNMP
    sent to the same IP address) they need to be reported
    individually."

-- OBJECT pktcDevEvLogCorrelationId - Same as PKTC-EVENT-MIB
```

```
-- OBJECT pktcDevEvLogAdditionalInfo      - Same as PKTC-EVENT-MIB

MODULE
    MANDATORY-GROUPS {
        pktcEUEMEMGroup
    }
    ::= { pktcEUEEventCompliances 1 }

pktcEUEMEMGroup OBJECT-GROUP
    OBJECTS {
        pktcEUEMEMVersion
    }
    STATUS current
    DESCRIPTION
        "The eUE Operator Group."
    ::= { pktcEUEEventGroups 1}

-- Notifications

-- pktcDevEvInform NOTIFICATION-TYPE      - Same as PKTC-EVENT-MIB
-- OBJECTS {pktcDevEvLogIndex, pktcDevEvLogTime,
-- pktcDevEvLogEnterprise,pktcDevEvLogId,
-- pktcDevEvLogEndpointName,pktcDevEvLogCorrelationId,ifPhysAddress}

-- pktcDevEvTrap NOTIFICATION-TYPE        - Same as PKTC-EVENT-MIB
-- OBJECTS {pktcDevEvLogIndex, pktcDevEvLogTime,
-- pktcDevEvLogEnterprise,pktcDevEvLogId,
-- pktcDevEvLogEndpointName,pktcDevEvLogCorrelationId,ifPhysAddress}

END
```

Annex D PacketCable eUE Additional Modules

D.1 Certificate Bootstrapping XML Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<!--(C) 2008 CableLabs. All rights reserved -->
<!--PacketCable E-UE Provisioning Certificate Bootstrapping XML Schema -->
<xsd:schema
    xmlns="http://www.cablelabs.com/namespaces/PacketCable/2.0/XSD/v1/CL-PKTC-CB"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema"

    targetNamespace="http://www.cablelabs.com/namespaces/PacketCable/2.0/XSD/v1/CL-PKTC-CB"
    elementFormDefault="qualified" attributeFormDefault="unqualified"
    xml:lang="en">

    <xsd:annotation>
        <xsd:documentation>
            This XML Schema is specified for use with the PacketCable E-UE Certificate
            Bootstrapping procedure.

            It is used to transmit IM Private Identifiers (IMPIs) and associated
            credentials.
        </xsd:documentation>
    </xsd:annotation>

    <xsd:element name="pktcEUECreds">
        <xsd:complexType>
            <xsd:sequence>
                <xsd:element name="clearIMPIMIBTable" type="xsd:boolean" minOccurs="0"
maxOccurs="1"/>
                <xsd:element minOccurs="0" maxOccurs="unbounded" ref="IMPI"/>
            </xsd:sequence>
        </xsd:complexType>
    </xsd:element>

    <xsd:element name="IMPI" type="IMPITYPE">
        <xsd:unique name="uniqueIMPIIndex">
            <xsd:selector xpath="./pktcEUECreds"/>
            <xsd:field xpath="@mibIMPIIndex"/>
        </xsd:unique>
    </xsd:element>

    <xsd:complexType name="IMPITYPE">
        <xsd:sequence>
            <xsd:element ref="ID"/>
            <xsd:element ref="Creds"/>
        </xsd:sequence>
        <xsd:attribute name="mibIMPIIndex" use="required" type="xsd:positiveInteger"/>
    </xsd:complexType>

    <xsd:element name="ID">
        <xsd:complexType mixed="true">
            <xsd:attribute name="idType" use="required" type="IDTYPE"/>
        </xsd:complexType>
    </xsd:element>

    <xsd:element name="Creds">
        <xsd:complexType mixed="true">
            <xsd:attribute name="credsType" use="required" type="CREDENTIALTYPE"/>
        </xsd:complexType>
    </xsd:element>
```

```

<xsd:simpleType name="IDTYPE">
  <xsd:restriction base="xsd:NMTOKEN">
    <xsd:enumeration value="privateIdentity"/>
  </xsd:restriction>
</xsd:simpleType>

<xsd:simpleType name="CREDENTIALTYPE">
  <xsd:restriction base="xsd:NMTOKEN">
    <xsd:enumeration value="none"/>
    <xsd:enumeration value="password"/>
    <xsd:enumeration value="presharedkey"/>
    <xsd:enumeration value="certificate"/>
  </xsd:restriction>
</xsd:simpleType>

</xsd:schema>

```

D.2 Presence Configuration MIB

CL-PKTC-EUE-PRS-MIB DEFINITIONS ::= BEGIN

IMPORTS

```

MODULE-IDENTITY,
OBJECT-TYPE,
Unsigned32
    FROM SNMPv2-SMI
RowStatus
    FROM SNMPv2-TC
OBJECT-GROUP,
MODULE-COMPLIANCE
    FROM SNMPv2-CONF
SnmAdminString
    FROM SNMP-FRAMEWORK-MIB
pktcEUEDevOpIndex
    FROM CL-PKTC-EUE-DEV-MIB
pktcEUEUsrIMPUIIndex
    FROM CL-PKTC-EUE-USER-MIB
pktcEUEMibs
    FROM CLAB-DEF-MIB;

```

pktcEUEPrsMIB MODULE-IDENTITY

```

LAST-UPDATED "200807100000Z" -- July 10, 2008
ORGANIZATION "Cable Television Laboratories, Inc."
CONTACT-INFO

```

```

    "Broadband Network Services
    Cable Television Laboratories, Inc.
    858 Coal Creek Circle,
    Louisville, CO 80027, USA
    Phone: +1 303-661-9100
    Email: mibs@cablelabs.com

```

Acknowledgements:

```

    Thomas Clack, Broadcom - Primary author,
    Zu Qiang, Ericsson
    Sumanth Channabasappa, CableLabs
    Eduardo Cardona, CableLabs
    and members of the PacketCable PACM Focus Team."

```

DESCRIPTION

```

    "This MIB module contains the configuration MIB
    objects for the Presence Service feature as defined
    by the PacketCable E-UE Provisioning Framework
    Specification."

```

```

REVISION "200807100000Z" -- July 10, 2008

```



```

DESCRIPTION
    "Initial version published as part of the CableLabs
    E-UE Provisioning Data Model Specification (PKT-SP-EUE-DATA).
    Included in ECN EUE-DATA-N-08.0504-7 and published as I02."
    ::= { pktcEUEMibs 7 }

-- Administrative assignments
pktcEUEPRSNNotifications OBJECT IDENTIFIER ::= { pktcEUEPrsMIB 0 }
pktcEUEPRSNObjects       OBJECT IDENTIFIER ::= { pktcEUEPrsMIB 1 }
pktcEUEPRSNConformance  OBJECT IDENTIFIER ::= { pktcEUEPrsMIB 2 }

pktcEUEPRSNCompliances   OBJECT IDENTIFIER ::= { pktcEUEPRSNConformance 1 }
pktcEUEPRSNGroups        OBJECT IDENTIFIER ::= { pktcEUEPRSNConformance 2 }

--
-- The NETWORK-Indexed Presence Configuration Table
--
pktcEUEPRSNwCfgTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF PktcEUEPRSNwCfgEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        " This data table represents the network-based Presence entries."

    REFERENCE "PacketCable E-UE Provisioning Framework Specification,
        OMA Presence SIMPLE Specification"
    ::= { pktcEUEPRSNObjects 1 }

pktcEUEPRSNwCfgEntry OBJECT-TYPE
    SYNTAX      PktcEUEPRSNwCfgEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        " Each entry in this table represents a Presence configuration
        parameter within the scope of a Device Operator.

        Rows in this table are considered to have a storage type of
        'volatile' and hence will not persist after an agent restart."
    INDEX {pktcEUEDevOpIndex}
    ::= { pktcEUEPRSNwCfgTable 1 }

PktcEUEPRSNwCfgEntry ::=
    SEQUENCE {
        pktcEUEPRSNwProvID      SnmpAdminString,
        pktcEUEPRSNwAppName     SnmpAdminString,
        pktcEUEPRSNwStatus      RowStatus
    }

pktcEUEPRSNwProvID OBJECT-TYPE
    SYNTAX      SnmpAdminString
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " This element identifies the Presence Service Provider.
        This value corresponds to the 'PROVIDER-ID' object
        defined in the OMA Presence SIMPLE specification.

        This element is optional."
    DEFVAL {}
    ::= { pktcEUEPRSNwCfgEntry 1 }

pktcEUEPRSNwAppName OBJECT-TYPE
    SYNTAX      SnmpAdminString
    MAX-ACCESS  read-create
    STATUS      current

```

```

DESCRIPTION
    " This element provides a user displayable name for the Presence
      Framework. This value corresponds to the 'NAME' object defined
      in the OMA Presence SIMPLE specification.

      This element is optional."
DEFVAL {""}
 ::= { pktcEUEPRSNwCfgEntry 2 }

pktcEUEPRSNwStatus OBJECT-TYPE
SYNTAX      RowStatus
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    " This object defines the row status associated with this
      particular row in the MIB table.

      The values of the objects 'pktcEUEPRSNwAppName' and
      'pktcEUEPRSNwProvID' MUST not be modified while this row is set to
      'active'."
 ::= { pktcEUEPRSNwCfgEntry 3 }

--
-- The USER-Indexed Presence Configuration Table
--

pktcEUEPRSUsrcfgTable OBJECT-TYPE
SYNTAX      SEQUENCE OF PktcEUEPRSUsrcfgEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    " This data table represents the user-based Presence entries
      "
REFERENCE "PacketCable E-UE Provisioning Framework Specification,
          OMA Presence SIMPLE Specification"

 ::= { pktcEUEPRSObjects 2 }

pktcEUEPRSUsrcfgEntry OBJECT-TYPE
SYNTAX      PktcEUEPRSUsrcfgEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    " Each entry in this table represents a Presence configuration
      parameter within the scope of a User.

      Rows in this table are considered to have a storage type of
      'volatile' and hence will not persist after an agent restart."
INDEX      {pktcEUEUsrcIMPUIIndex}
 ::= { pktcEUEPRSUsrcfgTable 1 }

PktcEUEPRSUsrcfgEntry ::=
    SEQUENCE {
        pktcEUEPRSUsrcClientObjDataLim      Unsigned32,
        pktcEUEPRSUsrcContSvrURI             SnmpAdminString,
        pktcEUEPRSUsrcSrcThrottlePub         Unsigned32,
        pktcEUEPRSUsrcMaxPrsSubs             Unsigned32,
        pktcEUEPRSUsrcMaxSubsPrsList         Unsigned32,
        pktcEUEPRSUsrcSvcURITemplate         SnmpAdminString,
        pktcEUEPRSUsrcStatus                 RowStatus
    }

pktcEUEPRSUsrcClientObjDataLim OBJECT-TYPE
SYNTAX      Unsigned32 (0..65535)
MAX-ACCESS  read-create

```

STATUS current

DESCRIPTION

" A Presence Source may use either direct or indirect content. Direct Content is the delivery of the Presence document as MIME content within a SIP message. Indirect content is the redirection of the Presence watcher by the Presence source to a Content Server for the delivery of the Presence document.

Should the Presence source make use of direct content then this object MUST be used for determining the size limit, in bytes, of the MIME Content delivered in a SIP method.

If the Presence source makes use of indirect content then this configuration element MUST be ignored.

This element is mandatory in the specifications however direct content is an optional capability."

DEFVAL {4096}

::= { pktcEUEPRSUsrcCfgEntry 1 }

pktcEUEPRSUsrcContSvrURI OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-create

STATUS current

DESCRIPTION

" If the Presence Source makes use of content indirection as described in the 'OMA Presence SIMPLE Specification', then this object MUST be used as the HTTP or HTTPS URI of the Content Server on which the MIME object containing the Presence document will be stored. The Presence source will then use the content indirection mechanism defined in RFC 4483 to provide the watcher with the URI of the stored content.

This element is optional"

DEFVAL {""}

::= { pktcEUEPRSUsrcCfgEntry 2 }

pktcEUEPRSUsrcThrottlePub OBJECT-TYPE

SYNTAX Unsigned32 (1..3600)

MAX-ACCESS read-create

STATUS current

DESCRIPTION

" This element defines the minimum time interval in seconds between two consecutive publications of a Presence document from a Presence Source using a SIP PUBLISH request.

This element is optional"

DEFVAL {60}

::= { pktcEUEPRSUsrcCfgEntry 3 }

pktcEUEPRSUsrcMaxPrsSubs OBJECT-TYPE

SYNTAX Unsigned32 (1..1000)

MAX-ACCESS read-create

STATUS current

DESCRIPTION

" This element defines the maximum number of subscriptions to the presence event package that a watcher may have.

Should a service provider wish to limit the number of subscriptions to different Presence sources from a Presence watcher then this element MUST be used.

This is in effect the maximum number of discrete Public Identities from which a watcher can obtain Presence information.

This element is optional"

DEFVAL {100}

::= { pktcEUEPRSUsrcCfgEntry 4 }

```

pktcEUEPRUsrMaxSubsPrsList OBJECT-TYPE
    SYNTAX      Unsigned32 (1..1000)
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " A Presence watcher may subscribe to multiple Presence sources that
          are represented by a single Resource List, see RFC 4662. A Resource
          List Server in the network then handles the discrete individual
          subscriptions to the elements within the list.
          Should a service provider wish to limit the number of elements within
          a resource list to which a watcher can subscribe (thus limiting the
          number of SIP subscriptions) then this element MUST be used.

          This element is optional"
    DEFVAL {100}
    ::= { pktcEUEPRUsrCfgEntry 5 }

pktcEUEPRUsrSvcURITemplate OBJECT-TYPE
    SYNTAX      SnmpAdminString
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " This element defines the syntax of the service URI.
          The Service URI Template MUST be a URI Template as
          specified in [OMA XDM-CORE].

          This element is optional"
    DEFVAL {"<xui>;presence-list=<id>"}
    ::= { pktcEUEPRUsrCfgEntry 6 }

pktcEUEPRUsrStatus OBJECT-TYPE
    SYNTAX      RowStatus
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        " This object defines the row status associated with this
          particular row in the MIB table.

          The values of any objects in this row MUST not be
          modified while this row is set to 'active'."
    ::= { pktcEUEPRUsrCfgEntry 7 }

-- -----
-- Conformance Information
-- -----

pktcEUEPrsMIBCompliances OBJECT IDENTIFIER ::= { pktcEUEPRsCompliances 1 }
pktcEUEPrsMIBGroups      OBJECT IDENTIFIER ::= { pktcEUEPRsGroups 2 }

-- Compliance Statements
pktcEUEPrsMIBCompliance MODULE-COMPLIANCE
    STATUS      current
    DESCRIPTION
        "The compliance statement for implementations of the EUE-PRS MIB."
    MODULE      -- this module
        MANDATORY-GROUPS {
            pktcEUEPRsReqObjGroup
        }
        -- optional groups
    GROUP      pktcEUEPRsOptObjGroup
    DESCRIPTION
        "This group is of optional support."

    ::= { pktcEUEPrsMIBCompliances 1 }

pktcEUEPRsReqObjGroup OBJECT-GROUP

```

```
    OBJECTS {
        pktcEUEPRUSrClientObjDataLim
    }
    STATUS current
    DESCRIPTION
        "The group of required objects."
    ::= { pktcEUEPrsMIBGroups 1}

pktcEUEPRSOptObjGroup OBJECT-GROUP
    OBJECTS {
        pktcEUEPRSNwAppName,
        pktcEUEPRSNwProvID,
        pktcEUEPRSNwStatus,
        pktcEUEPRUSrContSvrURI,
        pktcEUEPRUSrSrcThrottlePub,
        pktcEUEPRUSrMaxPrsSubs,
        pktcEUEPRUSrMaxSubsPrsList,
        pktcEUEPRUSrSvcURITemplate,
        pktcEUEPRUSrStatus
    }
    STATUS current
    DESCRIPTION
        "The group of optional objects."
    ::= { pktcEUEPrsMIBGroups 2}

END
```

Appendix I Illustrative PacketCable Deployment Examples

I.1 Example 1: Deployment with multiple Users and one PacketCable Application

An example of an eUE associated with two users, each associated with the same application, is illustrated in Figure 3. As a note, the use of Video On Demand (VOD) as an application is only an illustrative example, not an actual PacketCable application.

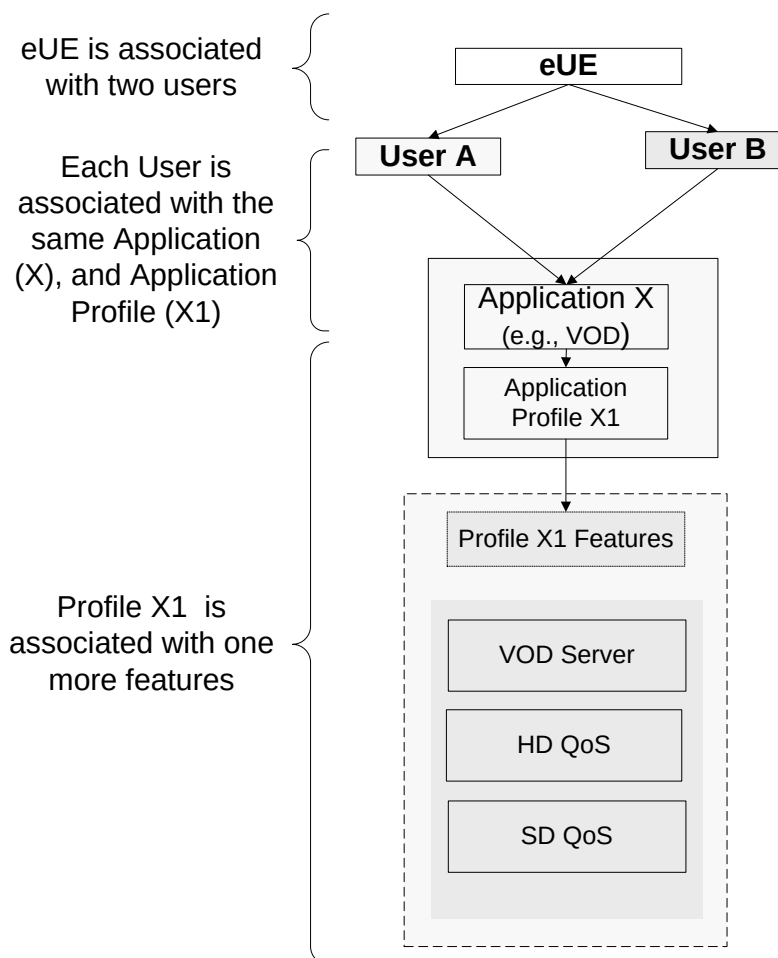


Figure 3 - Deployment with multiple users and one PacketCable Application

The MIB table assignments for the illustration in Figure 3 is given below, with the following assumptions:

- Application X has specified the Application Profile to Features Mapping Table, and Feature Tables.
- User identifiers 1 and 2 represent Users A and B, respectively.
- Application identifier 1 identifies Application X (VOD).
- Feature identifiers 1, 2, and 3 identify features VOD Server, HD QoS, and SD QoS, respectively.

User to Application Profile Mapping Table

(Mapping of User A to an application profile)

UsrAppMapTable entries

```
AppOrgID.1.1           = 4491 (CableLabs)
AppIdentifier.1.1       = 1    (App X, VOD)
AppIndexRef.1.1        = 10   (Profile X1)
```

(Mapping of User B to an application profile)

UsrAppMapTable entries

```
AppOrgID.2.1.3         = 4491 (CableLabs)
AppIdentifier.2.1       = 1    (App X, VOD)
AppIndexRef.2.1        = 10   (Profile X1)
```

Application Profile to Features Mapping Table (Application X)

(Profile X1)

XAppProfileToFeatureMapTable entries

```
AppFeatureIdentifier.10.1 =1(VOD Server)
AppFeatureTableIndexRef.10.1=5

AppFeatureIdentifier.10.2 =2(HD QoS)
AppFeatureTableIndexRef.10.2=5

AppFeatureIdentifier.10.3 =3(SD QoS)
AppFeatureTableIndexRef.10.3=5
```

Feature Tables

(VOD Server Table).5="vod.example.com"

(HD QoS Table).5="VIDEOCODEC=VX; AUDIOCODEC=AX; BANDWIDTH=XMBPS"

(SD QoS Table).5="VIDEOCODEC=VY; AUDIOCODEC=AY; BANDWIDTH=YMBPS"

I.2 Example 2: Deployment with multiple Users and multiple PacketCable Applications

An example of an eUE associated with multiple users, each with one or more applications, is illustrated in Figure 4. As a note, the use of voice as an application is only an illustrative example, not an actual PacketCable application.

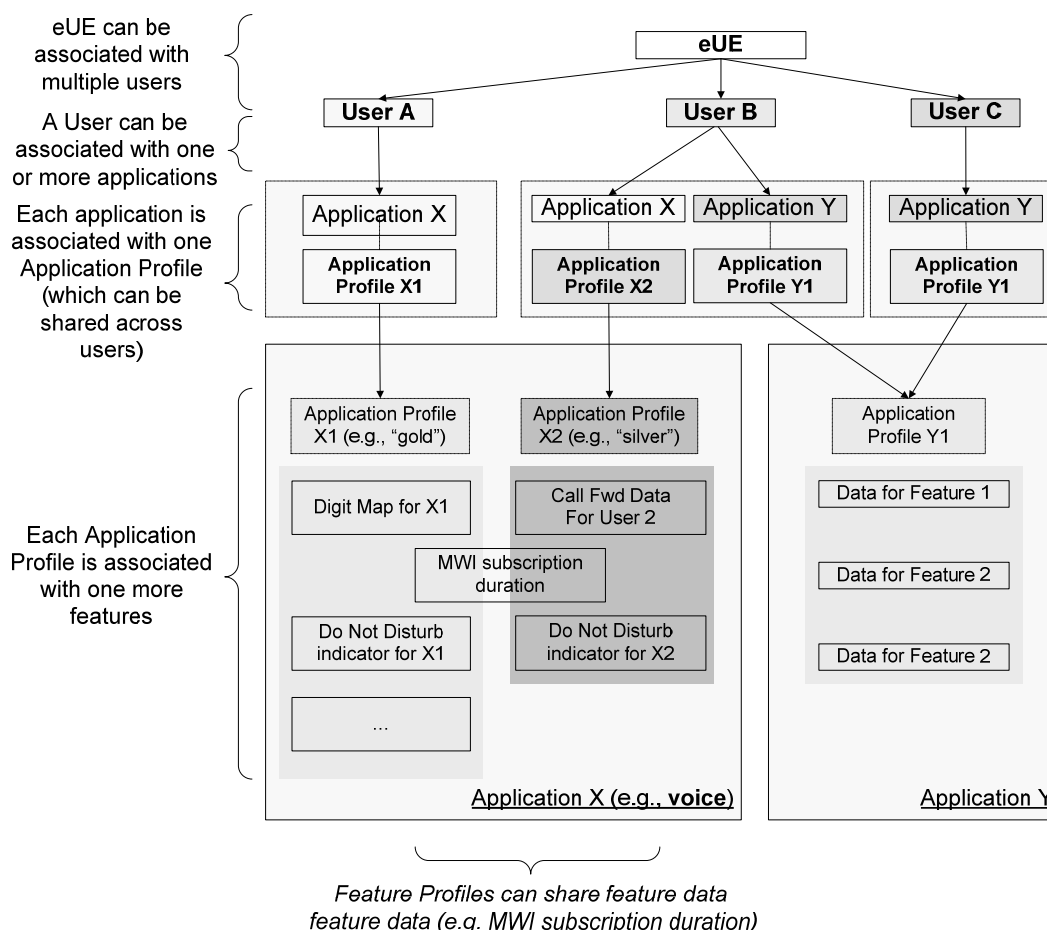


Figure 4 - Deployment with multiple users and multiple PacketCable Application

The MIB table assignments for the illustration in Figure 4 is given below, with the following assumptions:

- Applications X and Y have specified the Application Profile to Features Mapping Table, as required by this document
- User identifiers 1,2 and 3 represent Users A, B and C, respectively
- Application identifiers 1 and 99 identify Applications X and Y, respectively
- Feature identifiers 1, 2, and 3 identify features Digit Map, MWI and DND, respectively

User to Application Profile Mapping Table:

(Mapping of User A to an application profile)

UsrAppMapTable entries

AppOrgID.1.1	= 4491 (CableLabs)
AppIdentifier.1.1	= 1 (App X)
AppIndexRef.1.1	= 11 (Profile X1)

(Mapping of User B to an application profile)

UsrAppMapTable entries

AppOrgID.2.1	= 4491 (CableLabs)
AppIdentifier.2.1	= 1 (App X)
AppIndexRef.2.1	= 12 (Profile X2)

AppOrgID.2.2 = 4491 (CableLabs)
 AppIdentifier.2.2 = 99 (App Y)
 AppIndexRef.2.2 = 20 (Profile Y1)

(Mapping of User C to an application profile)

UsrAppMapTable entries

AppOrgID.3.1 = 4491 (CableLabs)
 AppIdentifier.3.1 = 99 (App Y)
 AppIndexRef.3.1 = 20 (Profile Y1)

Application Profile to Features Mapping Table (Application X):

(Profile X1)

XAppProfileToFeatureMapTable entries

AppFeatureIdentifier.11.1 = 1(DIGIT MAP)
 AppFeatureTableIndexRef.11.1= 1

AppFeatureIdentifier.11.2 = 2(MWI SUB)
 AppFeatureTableIndexRef.11.2= 11

AppFeatureIdentifier.11.3 = 3(DND)
 AppFeatureTableIndexRef.11.3= 3

(Profile X2)

XAppProfileToFeatureMapTable entries

AppFeatureIdentifier.12.1 = 1(DIGIT MAP)
 AppFeatureTableIndexRef.12.1= 2

AppFeatureIdentifier.12.2 = 2(MWI SUB)
 AppFeatureTableIndexRef.12.2= 11

AppFeatureIdentifier.12.3 = 3(DND)
 AppFeatureTableIndexRef.12.3= 4

Application Profile to Features Mapping Table (Application Y):

(Profile Y1)

YAppProfileToFeatureMapTable entries

AppFeatureIdentifier.20.1 = 1
 AppFeatureTableIndexRef.20.1= 25

AppFeatureIdentifier.20.2 = 2
 AppFeatureTableIndexRef.20.2= 0
 AppNWFeatureStatus.20.2 = False

Note: An IndexRef of 0 can indicate that there are only activation controls for the feature; see also additional note for the next feature

YAppProfileToFeatureMapTable entries

AppFeatureIdentifier.20.1 = 3
 AppFeatureTableIndexRef.20.1= 0

Note: An IndexRef of 0 can also indicate other settings such as per Operator data

Application X Feature Tables

(DIGIT MAP).1="<<DIGIT MAP ABC>>"
 (DIGIT MAP).2="<<DIGIT MAP XYZ>>"
 (MWI SUB).11="60 secs"
 (DND).3="True"
 (DND).4="False"

Application Y Feature Tables

(Feature 1 has a Feature Table)
 (Feature 1).25="<<Feature 1 data>>"

(Feature 2 has no configuration data)

(Feature 3 is per Operator configuration)

(Feature 3).**Operator**="<<Feature 3 data>>

Appendix II Acknowledgements

CableLabs wishes to thank the PacketCable PACM focus team participants for various contributions and efforts that led to the development of this specification. Specifically, the following individuals are thanked for their direct contributions.

- Eugene Nechamkin (Broadcom)
- Thomas Clack (Broadcom)
- John Berg (CableLabs)
- Josh Littlefield (Cisco)

Special appreciation is extended to Eugene for his role as primary editor of the document and for coordinating the contributions and Thomas for his role as the primary author of the MIB modules.

Sumanth Channabasappa and the PacketCable Architects, CableLabs, Inc.

Appendix III Revision History

The following Engineering Change Notices were incorporated in PKT-SP-EUE-DATA-I02-080710.

ECN	ECN Date	Summary
EUE-DATA-N-08.0504-7	5/27/2008	Incorporation of feedback from vendor and ATP focus teams
EUE-DATA-N-08.0524-5	5/27/2008	Alignment of management requirements between PacketCable 1.5 and PacketCable 2.0